

#### **OPTIONS**

#### Flush Volume

1.6 gpf (6.0 Lpf) (1.6) 1.28 gpf (4.8 Lpf) (1.28) 1.1 gpf (4.2 Lpf) (1.1)

### **Finish**

Polished Chrome (CP)
Polished Brass (PB)
Brushed Nickel (BN)
Brushed Stainless (SF)
Graphite (GR)

### **Water Efficiency**

Low Consumption High Efficiency

#### Handle

Front of Valve (H)
Saniguard®
Left of Valve (G)
Nickel-Silver (YA)
CV
Right of Valve (I)

#### **Push Button**

Metal Index (L) 3" Metal Oscillating (L3) Front of Valve (HL3)

### **Control Stop**

1" Straight (E) Wheel Handle (K) Ground Joint (GJ) Less (L/STOP)

## Tailpiece

H551A 3 1/16" (H551A-3-1/16) H551A 4 1/16" (H551A-4-1/16) H551A 5 1/16" (H551A-5-1/16)

# Inlet


Back of Valve (B) Left of Valve (C)

## Vacuum Breaker

Less (XYV)

## Offset

1 ½" (38mm) (1-1/2-OFST) 1" (25mm) (1-OFST)

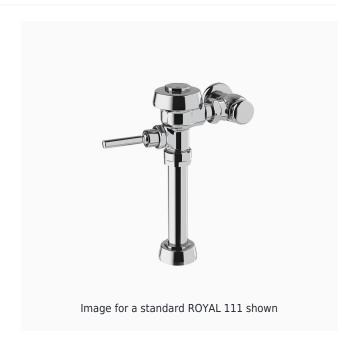

### **DESCRIPTION**

Royal® Exposed Manual Water Closet Flushometer

#### **FEATURES**

- Water conservation is aided by the ADA-compliant, non-holdopen handle, which prevents toilet from exceeding intended flush volume
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Integrity of the product is maintained with the vandalresistant stop cap
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece
- PERMEX synthetic rubber diaphragm with Dual Filtered Fixed Bypass
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

### **DOWNLOADS**

- Royal Exposed Installation Instructions
- Control Stop Repair and Maintenance Guide
- Flush Connections Flanges Repair and Maintenance Guide
- Tail Piece Repair and Maintenance Guide
- Royal Manual Diaphragm Flushometer Repair and Maintenance Guide
- Tools/Accessories
- Bumper Pipe and Tube Supports Repair & Maintenance Guide

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



2" (51mm) (2-OFST)

#### **Outlet Tube**

Trap Primer (TP)

F189

F188

F190

# **Adapter**

Cast Set Screw Wall Flange (YBC)

# **Bumper**

Angle Stop (YO) Angle Stop Extended (YG)

### **Pipe Support**

Solid Ring (YK)

### **Special Features**

Less Logo (LL)

Carbon Offset (CO)

Whitworth Thread (WWT)

# **Compliances & Certifications**

**BAA Compliant** 

cUPC Certified

**BABAA** Compliant

Made in the USA

**ADA Compliant** 

**UPC** Certified

Satisfies LEED Credits

WaterSense Listed

cUPC Green Certified

**BREEAM Water Credit** 

# NOTES

For product line drawings, view model-specific spec sheets.

All information contained within this document subject to change without notice.

- Flushometer Pressure gauges
- Additional Downloads

### **VIDEOS**



PVD Special Finishes