

OPTIONS**Flush Volume**

- 0.125 gpf (0.5 Lpf) (0.125)
- 0.5 gpf (1.9 Lpf) (0.5)
- 0.25 gpf (0.9 Lpf) (0.25)
- 1.0 gpf (3.8 Lpf) (1.0)

Finish

- Polished Chrome (CP)
- Brushed Nickel (BN)
- Brushed Stainless (SF)
- Graphite (GR)
- Polished Brass (PB)

Water Efficiency

- High Efficiency
- Low Consumption

Override

- Electrical (OR)
- Less (L/OR)

Control Stop

- 1" (1-IN-STOP)
- Ground Joint (GJ)

Special Features

- Carbon Offset (CO)
- Less Logo (LL)

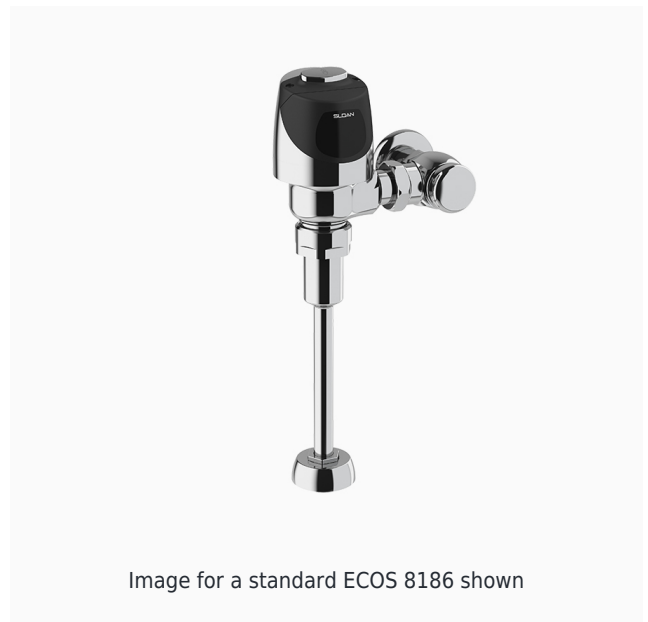
Compliances & Certifications

- ADA Compliant
- BAA Compliant
- cUPC Certified
- Satisfies LEED Credits
- WaterSense Listed
- cUPC Green Certified
- BREEAM Water Credit
- Green Globes Water Credit
- LEED V4 Water Efficiency Credit
- EPD

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

**DESCRIPTION**

ECOS® Exposed Sensor Urinal Flushometer

FEATURES

- Water-efficient flush volume of either .13 gpf or .25 gpf
- Automatically operates by means of an infrared sensor with multiple-focused, lobular sensing fields for high and low target detection
- User-friendly, three-second flush delay
- High copper, low zinc brass castings for dezincification resistance
- Fixed metering bypass and no external volume adjustment to ensure water conservation
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Sloan ECOS Valve Installation Instructions](#)
- [Sloan Ecos Valve \(Spanish\) Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [ECOS Repair and Maintenance Guide](#)
- [Sloan Optima Plus Repair and Maintenance Guide](#)
- [Flushometer Pressure gauges](#)
- [Additional Downloads](#)

VIDEOS

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

 PVD
Special
Finishes