

## OPTIONS

### Flush Volume

- 3.5 gpf (13.2 Lpf) (3.5)
- 1.6 gpf (6.0 Lpf) (1.6)
- 1.28 gpf (4.8 Lpf) (1.28)

### Water Efficiency

- Water Saver
- Low Consumption
- High Efficiency

### L Dimension

- 4 ¾" (121mm) (4-3/4-LDIM)
- 3 ¾" (95mm) (3-3/4-LDIM)
- 5 ¾" (146mm) (5-3/4-LDIM)
- 10 ¾" (273mm) (10-3/4-LDIM)
- 6 ¾" (171mm) (6-3/4-LDIM)
- 7 ¾" (197mm) (7-3/4-LDIM)
- 8 ¾" (222mm) (8-3/4-LDIM)
- 9 ¾" (248mm) (9-3/4-LDIM)


### Compliances & Certifications

- BAA Compliant
- BABAA Compliant
- UPC Certified
- cUPC Certified
- BREEAM Water Credit
- Green Globes Water Credit
- LEED V4 Water Efficiency Credit
- Satisfies LEED Credits
- WaterSense Listed
- cUPC Green Certified

## NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

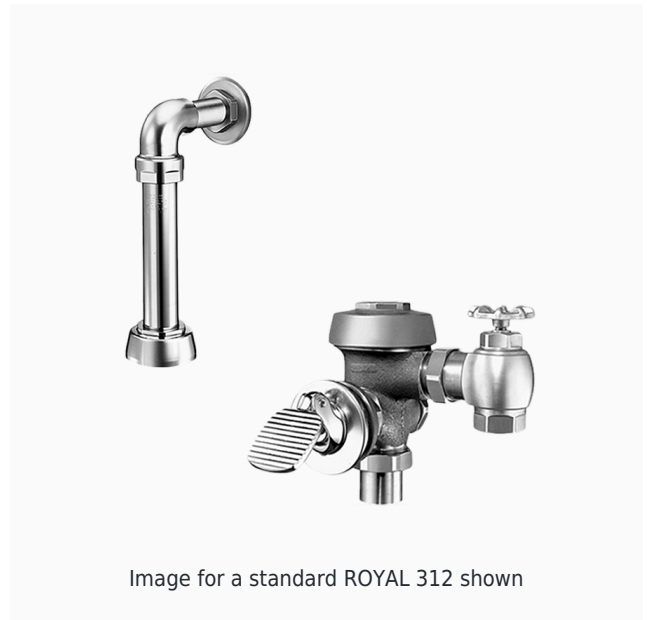

## DESCRIPTION

Royal® Exposed Manual Specialty Water Closet Foot Pedal Flushometer

## FEATURES

- Varying flush volumes start as low as 1.28 gpf/4.8 Lpf
- Water conservation is aided by non-hold-open foot pedal (not ADA compliant)
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- PERMEX synthetic rubber diaphragm with Dual Filtered Fixed Bypass
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

## DOWNLOADS

- [Royal/Regal/Crown Naval Foot Pedal Flushometer Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Royal Manual Diaphragm Flushometer Repair and Maintenance Guide](#)
- [Additional Downloads](#)