

OPTIONS**Power Type**

Battery

Body Type

Low

Mounting

Deck

Power Supply

Battery (BAT)

Sensor Type

Infrared (IR)

Flow Rate

0.35 gpm (1 Lpm) (0.35GPM)

0.5 gpm (2 Lpm) (0.5GPM)

Spray Type

Multi-Laminar (MLM)

Spout Type

Pedestal

Trim Plate

4" (102mm) (4)

Finish

Polished Chrome (CP)

Control Access

Below Deck

Mixer

Back-Check Tee (TEE)

Below Deck Manual Mixing Valve (BDM)

Compliances & Certifications

ADA Compliant

ASME A112.18.1 Compliant

CEC Compliant

CalGreen Compliant

NYC604.4

Proposition 65

TAS

UPC Certified

UPC Low Lead Compliant

cUPC Certified

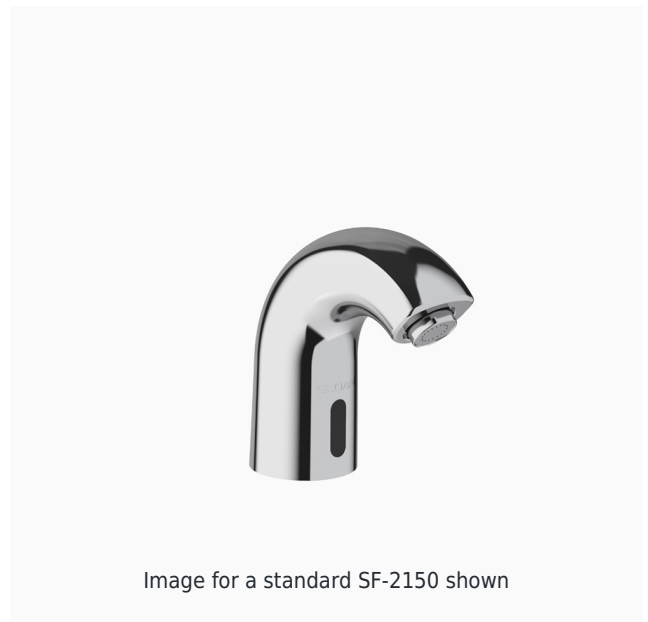
NOTESFor product line drawings, [view model-specific spec sheets](#).

Image for a standard SF-2150 shown

DESCRIPTION

Sloan® Battery-Powered Deck-Mounted Low Body Faucet

FEATURES

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Brass Pedestal Hand Washing Faucet with the following features:

- Adjustable Infrared Sensor Range
- 36" (914 mm) Long Sensor Cable
- 24" (610 mm) Long Flex Hose
- Filtered Solenoid Valve with serviceable Strainer Filter
- Includes Four (4) AA-size Batteries
- Includes appropriate Mounting Hardware
- 1 Year limited warranty

DOWNLOADS

- [SF Series Installation Instructions](#)
- [SF Series \(FR\) Installation Instructions](#)
- [SF Series \(SP\) Installation Instructions](#)
- [SFP 35-A Installation Instructions](#)
- [SF 2100/2150 Faucet Extension Installation Instructions](#)
- [Trim Plate Guide](#)
- [Sloan 2100/2150 Repair and Maintenance Guide](#)
- [Additional Downloads](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

All information contained within this document subject to change without notice.

[Find a matching soap dispenser](#) for this faucet.

[Find a compatible sink](#) for this faucet.

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com