

**OPTIONS**

**Flush Volume**

- 1.0 gpf (3.8 Lpf) (1.0)
- 1.5 gpf (5.7 Lpf) (1.5)
- 0.5 gpf (1.9 Lpf) (0.5)
- 0.125 gpf (0.5 Lpf) (0.125)
- 0.25 gpf (0.9 Lpf) (0.25)

**Finish**

- Polished Chrome (CP)
- Polished Brass (PB)
- Brushed Stainless (SF)
- Brushed Nickel (BN)
- Graphite (GR)

**Water Efficiency**

- Low Consumption
- High Efficiency
- Water Saver

**Bypass**

- Dual-Filtered Bypass (DBP)

**Handle**

- Front of Valve (H)
- Sanigard® (SG)
- Nickel-Silver (YA)

**Push Button**

- Metal Index (L)
- Front of Valve (HL3)
- 3" Metal Oscillating (L3)

**Control Stop**

- 1" Straight (E)
- Less (L/STOP)
- 1" (1-IN-STOP)
- Ground Joint (GJ)
- Wheel Handle (K)

**Tailpiece**

- H551A 3 1/16" (H551A-3-1/16)
- H551A 4 1/16" (H551A-4-1/16)

**Inlet**

- Left of Valve (C)
- Back of Valve (B)

**Vacuum Breaker**

- Less (XYV)

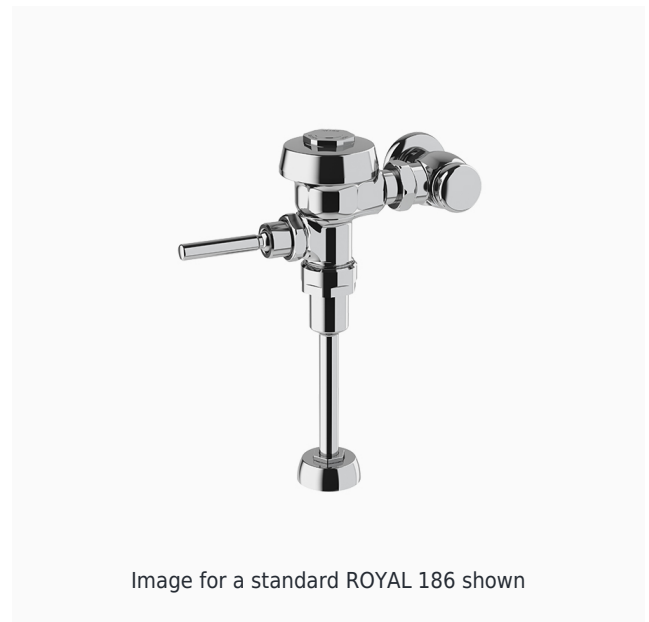


Image for a standard ROYAL 186 shown

**DESCRIPTION**

Royal® Exposed Manual Urinal Flushometer

**FEATURES**

- Water conservation is aided by the ADA-compliant, non-hold-open handle, which prevents urinal from exceeding intended flush volume
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Integrity of the product is maintained with the vandal-resistant stop cap
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece
- PERMEX synthetic rubber diaphragm with Dual Filtered Fixed Bypass
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

**DOWNLOADS**

- [Royal Exposed Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Royal Flushometers Repair and Maintenance Guide](#)
- [Flushometer Pressure gauges](#)
- [Additional Downloads](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • [sloan.com](http://sloan.com)

**Adapter**

Cast Set Screw Wall Flange (YBC)

**Pipe Support**

Solid Ring (YK)

**Special Features**

Carbon Offset (CO)

Less Logo (LL)

**Compliances & Certifications**

BAA Compliant

cUPC Certified

ADA Compliant

Satisfies LEED Credits

WaterSense Listed

cUPC Green Certified

BREEAM Water Credit

Green Globes Water Credit

LEED V4 Water Efficiency Credit

Declare

**VIDEOS**

PVD Special Finishes

**NOTES**

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.