

CODE NUMBER

34001013

DESCRIPTION

4-4.5 / 2-2.5 Lpf (1.06-1.2 / 0.53-0.6 gpf), Filtered, Polished Chrome Finish, Fixture Connection , Dual Flush, Battery with Hardwired Option, TruFlush Concealed Manual Electronic Hardwired Water Closet Flushometer.

DETAILS

- Full Flush Volume: 4-4.5 Lpf (1.06-1.2 gpf)
- Reduced Flush Volume: 2-2.5 Lpf (0.53-0.6 gpf)
- Finish: Polished Chrome (CP)
- Power Type: Battery with Hardwired Option
- Battery Life: 5 years
- Bypass: Filtered
- Fixture Type: Water Closet

FEATURES

- Electroplated heavy duty metal wall plate
- Corrosion-resistant, vandal resistant plate
- Sloan waterproof electronic PCB with tactile push buttons
- Ability to hardwire with battery backup
- Includes four (4) AA size batteries

**ELECTRICAL SPECIFICATIONS**

- Arming Delay: 8 seconds
- Battery Life: 5 years
- Control Circuit: 6 VDC Input Solid State
- Solenoid Operator: 6 VAC
- Transformers (specify separately):
 - EL-386 (Up to 1 flushometer)
 - EL-451 (Up to 6 flushometers)

VALVE OPERATING PRESSURE (FLOWING)

20-80 PSI (138-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

DOWNLOADS

- [TRF-8936, 8924, 8924-N Wall Plate Installation Guide](#)
- [TRF Electronic Dual Flush Repair & Maintenance Guide - India](#)

NOTES

All information contained within this document subject to change without notice.

[Find a compatible urinal](#) for this flushometer.


[Find a compatible water closet](#) for this flushometer.

Battery life varies according to actual usage and restroom conditions.

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

ROUGH-IN

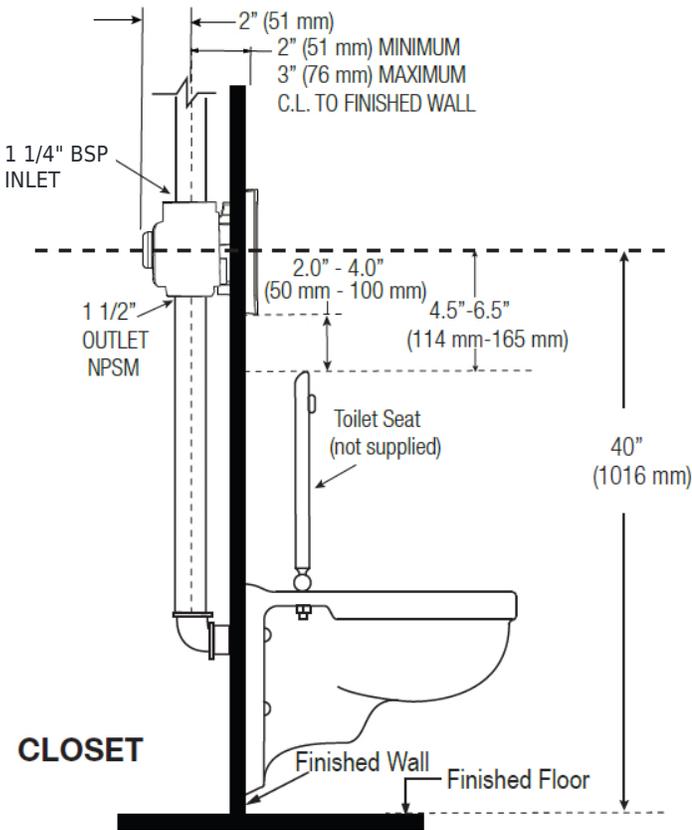

NOTE : Flush Connections shown in dotted lines not included.

