

CODE NUMBER

0375291

DESCRIPTION

PWT System Single-Line Mixing Manifold

FEATURES

PWT Single Line Mixing Manifold

- Manifold containing two electronically activated solenoids used to supply hot, cold, and mixed water to one lavatory fixture

Plumbing Specifications


- 1/2 Inch Pipe Copper Solder Unions at water inlets
- Soft Nose Union between solenoids
- Includes one fitting kit containing the following:
 - Two 3/8 NPT to 3/8 Tube
 - One 0.5 gpm Flow Orifice
 - One 3/8 NPT to 3/8 NPT Coupling
 - 20 feet 3/8 OD Nylon Tubing
- Solenoid Specifications
 - 24 VAC – 50/60 Hz Operating Voltage
 - Current: In Rush 12 VA (500mA); Holding 4.63 VA (193 mA)
 - Power Consumption: 7 Watts
 - 160 Fahrenheit Maximum water temperature
- Brass body with integral 'Y' strainer (80 Mesh)
- Stainless Steel Valve Seat
- Includes 15' cable w/ 6 position, 4 pin RJ-11 connector to connect to Sloan PWT MCR-Series Controller

Accessories

- Solenoid cable length can be increased to a maximum overall length of 200 feet with additional PWT extension cord kits
- ETF-1003-36 3' single wire extension cord kit
- ETF-1003-108 9' single wire extension cord kit
- ETF-1003-240 20' Single wire extension cord kit
- ETF-1003-600 50' single wire extension cord kit

NOTES

All information contained within this document subject to change without notice.

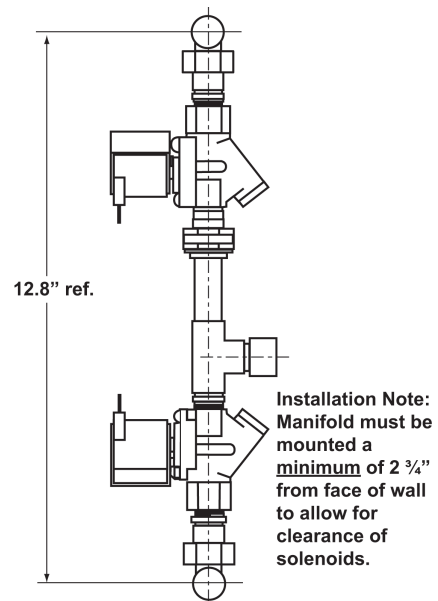

DOWNLOADS

- [Additional Downloads](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

Sloan 10500 Seymour Ave, Franklin Park, IL 60131
Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com