

CODE NUMBER

10001310

DESCRIPTION

SU-1009 Urinal and SLOAN 186 SMOOTH Flushometer.

COMPONENTS

Flushometer: Code 3772636Urinal: Code 1101009

DETAILS

• Flush Volume: 0.125 gpf (0.5 Lpf)

Nominal Dimensions: 14 ¼" × 17 ¼" × 25 ½" (362 × 438 × 648mm)

FLUSHOMETER FEATURES

- High Chloramine Resistant PERMEX® Synthetic Rubber Diaphragm with Dual Linear Filtered Bypass and Vortex Cleansing ActionTM
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop
- Locking Vandal Resistant Stop Cap
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange w/Set Screw
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Handle Packing, Main Seat, Stop Seat and Vacuum Breaker to be molded from PERMEXTM Rubber Compound for Chloramine Resistance
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance
- ADA Compliant OPTIMA® SMOOTH® Infrared Sensor for automatic "Hands-free" operation
- 6 VAC Hardwired Transformer sold separately
- "User in View" Flashing LED
- 72 Hour Sentinel Flush Mode
- Mechanical Manual Override Flush Handle

FIXTURE FEATURES

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- ¾" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested



COMPLIANCES & CERTIFICATIONS























(ADA Compliant, BAA Compliant, BREEAM Water Credit, CalGreen Compliant, CEC Compliant, cUPC Green Certified, EPD, Green Globes Water Credit, HPD, LEED V4 Water Efficiency Credit, Satisfies LEED Credits, WELL Building Standard)

DOWNLOADS

- Standard Spud Urinal Installation Instructions
- Sloan Exposed Installation Instructions
- EL 600-A Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Sloan Diaphgram Chart (SP) Repair and Maintenance Guide
- Additional Downloads

NOTES

All information contained within this document subject to change without notice.


WARRANTY

View Warranty Information

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



ROUGH-IN

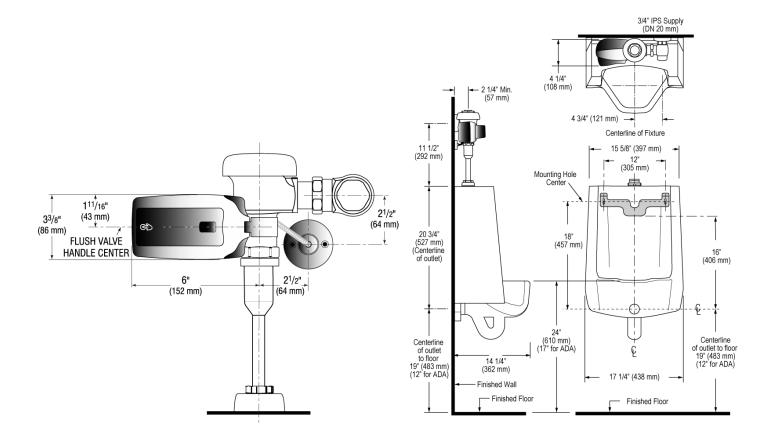

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com