

# CODE NUMBER

10001420

## DESCRIPTION

SU-1009 Urinal and SLOAN 186 SFSM Flushometer.

### COMPONENTS

- Flushometer: Code 3782688
- Urinal: Code 1101009

## DETAILS

- Flush Volume: 0.125 gpf (0.5 Lpf)
- Nominal Dimensions: 14 ¼" × 17 ¼" × 25 ½" (362 × 438 × 648mm)

### **FLUSHOMETER FEATURES**

- PERMEX® high-efficiency synthetic rubber diaphragm with dual linear filtered bypass
- Four (4) size C batteries included
- "Low Battery" Flashing LED
- "User in View" Flashing LED
- No External Volume Adjustment to Ensure Water Conservation
- True Mechanical Override Flush Button
- 72-Hour Sentinel Flush
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange with Set Screw
- Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine resistance
- 3/4" IPS screwdriver Bak-Chek® angle stop with vandal resistant stop cap

## **FIXTURE FEATURES**

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- <sup>3</sup>⁄<sub>4</sub>" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested



# **COMPLIANCES & CERTIFICATIONS**



(ADA Compliant, BAA Compliant, BREEAM Water Credit, CalGreen Compliant, CEC Compliant, cUPC Green Certified, EPD, Green Globes Water Credit, HPD, LEED V4 Water Efficiency Credit, Satisfies LEED Credits, WELL Building Standard)

#### DOWNLOADS

- Standard Spud Urinal Installation Instructions
- Sloan Exposed Installation Instructions
- EBV-500/550-A Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Sloan Diaphgram Chart (SP) Repair and Maintenance Guide
- EBV500/EBV550 Repair and Maintenance Guide
- Additional Downloads

## NOTES


All information contained within this document subject to change without notice.

#### WARRANTY

**View Warranty Information** 

# **ROUGH-IN**

SLOAN

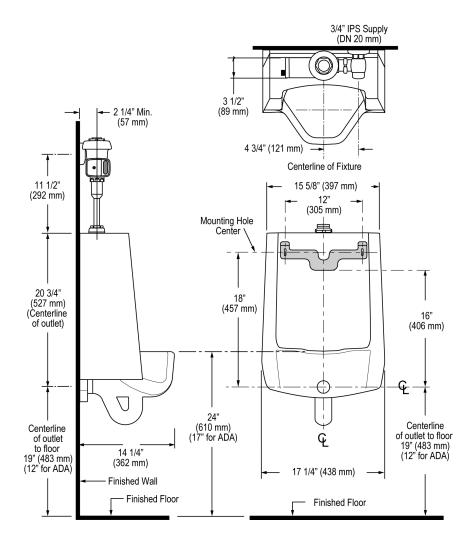

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com