

CODE NUMBER

10002002

DESCRIPTION

SU-1009 Urinal and ROYAL 186 Flushometer.

COMPONENTS

Flushometer: Code 3912732Urinal: Code 1101009

DETAILS

• Flush Volume: 0.125 gpf (0.5 Lpf)

• Nominal Dimensions: 14 $\frac{1}{4}$ " × 17 $\frac{1}{4}$ " × 25 $\frac{1}{2}$ " (362 × 438 × 648mm)

FLUSHOMETER FEATURES

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Sweat Solder Adapter with Cover Tube & Cast Wall Flange with Set Screw
- Brushed Stainless Finish
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop w/ Free Spinning Vandal Resistant Stop Cap

FIXTURE FEATURES

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- ¾" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested



COMPLIANCES & CERTIFICATIONS





























(ADA Compliant, BAA Compliant, BABAA Compliant, BREEAM Water Credit, cUPC Certified, cUPC Green Certified, EPD, Green Globes Water Credit, HPD, LEED V4 Water Efficiency Credit, Made in the USA, Satisfies LEED Credits, UPC Certified, WaterSense Listed, WELL Building Standard)

USA

DOWNLOADS

- Royal Exposed Installation Instructions
- Standard Spud Urinal Installation Instructions
- Additional Downloads

NOTES


All information contained within this document subject to change without notice.

WARRANTY

View Warranty Information



ROUGH-IN

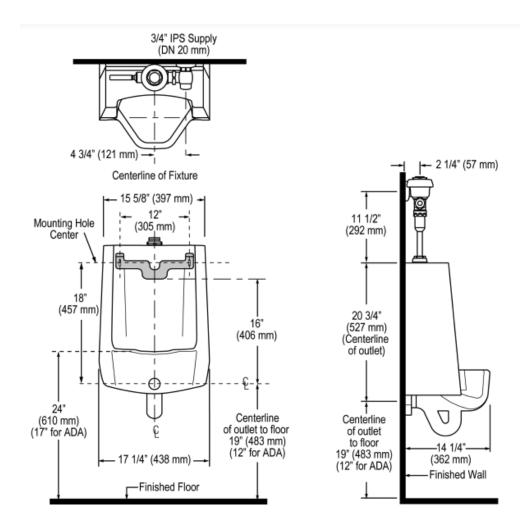

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com