

### **CODE NUMBER**

10051010

#### DESCRIPTION

SU-1009 Urinal and SLOAN 186 Flushometer.

### **COMPONENTS**

Flushometer: Code 3782655Urinal: Code 1101009

### **DETAILS**

• Flush Volume: 0.5 gpf (1.9 Lpf)

• Nominal Dimensions: 14  $\frac{1}{4}$ " × 17  $\frac{1}{4}$ " × 25  $\frac{1}{2}$ " (362 × 438 × 648mm)

### **FLUSHOMETER FEATURES**

Quiet, Exposed, Diaphragm Type, Chrome Plated High Efficiency Urinal

- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- Vacuum Breaker with Flush Connection
- Spud Coupling and Spud Flange for 3/4" Top Spud
- Sweat Solder Adapter with Cover Tube and Cast Wall Flange
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- High Efficiency flush accuracy
- Diaphragm, Handle Packing and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- WaterSense compliant when used with a 0.5 gpf WaterSense fixture

# **FIXTURE FEATURES**

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- ¾" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested



### **COMPLIANCES & CERTIFICATIONS**





























(ADA Compliant, BAA Compliant, BREEAM Materials Credit, BREEAM Water Credit, cUPC Green Certified, EPD, Green Globes Materials & Resources Credit, Green Globes Water Credit, HPD, LEED Materials & Resources EPD Credit, LEED Materials & Resources HPD Credit, LEED V4 Water Efficiency Credit, Satisfies LEED Credits, WELL Building Standard)

#### **DOWNLOADS**

- Standard Spud Urinal Installation Instructions
- Sloan Exposed Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Additional Downloads

### NOTES


All information contained within this document subject to change without notice.

### WARRANTY

View Warranty Information



# **ROUGH-IN**

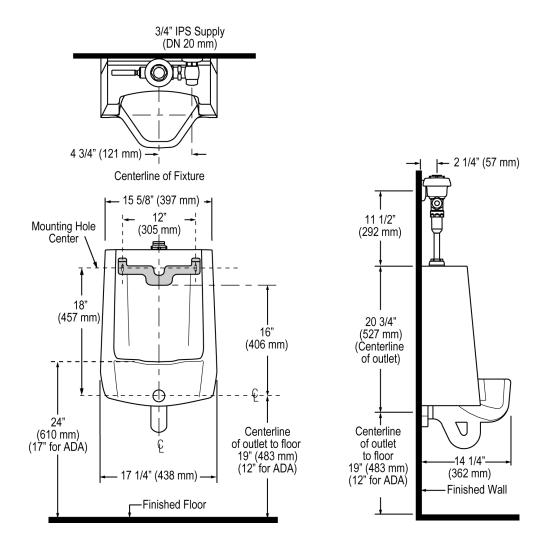

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com