

CODE NUMBER

10061331

DESCRIPTION

SU-1009 Urinal and SLOAN 186 ESS Flushometer.

COMPONENTS

Flushometer: Code 3772673Urinal: Code 1101009

DETAILS

• Flush Volume: 1.0 gpf (3.8 Lpf)

• Nominal Dimensions: 14 $\frac{1}{4}$ " × 17 $\frac{1}{4}$ " × 25 $\frac{1}{2}$ " (362 × 438 × 648mm)

FLUSHOMETER FEATURES

- High Chloramine Resistant PERMEX® Synthetic Rubber Diaphragm with Linear Filtered Bypass and Vortex Cleansing ActionTM
- Vacuum Breaker with Flush Connection
- Sweat Solder Adapter with Cover Tube and Cast Wall Flange
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- Spud Coupling and Spud Flange for 3/4" Top Spud
- No External Volume Adjustment to Ensure Water Conservation
- OPTIMA® EL-1500 Self-Adaptive Infrared Sensor with Indicator Light
- Diaphragm, Stop Seat and Vacuum Breaker to be molded from PERMEX® rubber compound for Chloramine resistance

FIXTURE FEATURES

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- ¾" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested



COMPLIANCES & CERTIFICATIONS















(ADA Compliant, BAA Compliant, cUPC Certified, EPD, HPD, UL Certified, WELL Building Standard)

DOWNLOADS

- Standard Spud Urinal Installation Instructions
- Sloan/Regal Concealed and Exposed Sensor Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Optima ESS Repair and Maintenance Guide
- Additional Downloads

NOTES

All information contained within this document subject to change without notice.


WARRANTY

View Warranty Information

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



ROUGH-IN

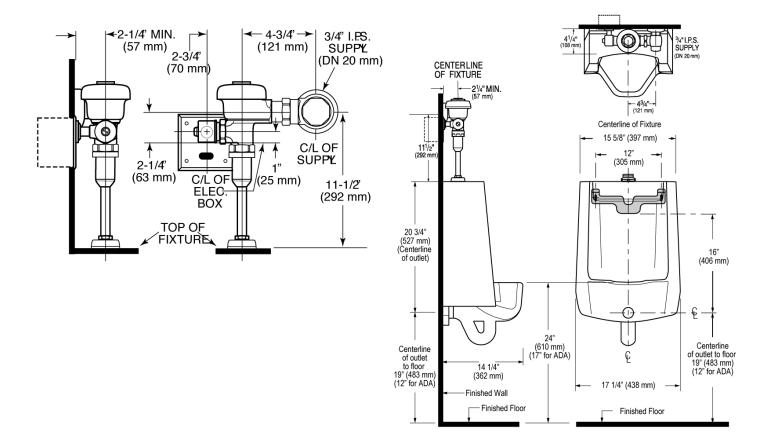

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com