

This product has been replaced with: #10051415



#### **CODE NUMBER**

10061415

## **DESCRIPTION**

SU-1009 Urinal and SLOAN 8186 Flushometer.

#### **COMPONENTS**

Flushometer: Code 3790013Urinal: Code 1101009

#### **DETAILS**

• Flush Volume: 1.0 gpf (3.8 Lpf)

• Nominal Dimensions: 14  $\frac{1}{4}$ " × 17  $\frac{1}{4}$ " × 25  $\frac{1}{2}$ " (362 × 438 × 648mm)

## **FLUSHOMETER FEATURES**

- High Chloramine Resistant PERMEX® Synthetic Rubber Diaphragm with Linear Filtered Bypass and Vortex Cleansing ActionTM
- Sweat Solder Adapter with Cover Tube and Cast Wall Flange
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- Spud Coupling and Spud Flange for 3/4" Top Spud
- "Low Battery" Flashing LED
- No External Volume Adjustment to Ensure Water Conservation
- Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine resistance
- Infrared Sensor with Multiple-focused, Lobular Sensing Fields for high and low target detection
- Engineered Plastic Cover with replaceable Lens Window
- Courtesy Flush® Override Button
- Four (4) Size AA Batteries included

## **FIXTURE FEATURES**

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- 3/4" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested



## **COMPLIANCES & CERTIFICATIONS**













(ADA Compliant, BAA Compliant, cUPC Certified, EPD, HPD, WELL Building Standard)

## **DOWNLOADS**

- Standard Spud Urinal Installation Instructions
- G2 and ECOS Single Flush Optima Plus Valve Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Additional Downloads

# **NOTES**


All information contained within this document subject to change without notice.

### WARRANTY

View Warranty Information



### **ROUGH-IN**

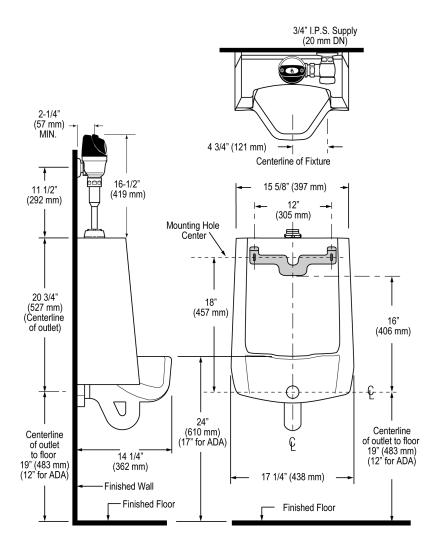

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com