

CODE NUMBER

1101210

DESCRIPTION

Vitreous China Retrofit Washdown Urinal.

DETAILS

- Flush Volume: 0.125 gpf (0.5 Lpf)
- Flush volume determined by the flushometer used with the fixture
- Nominal Dimensions: 14 ½" x 20 ¾" x 25 ¼" (368 x 527 x 641mm)

FEATURES

- Wall hung vitreous rear spud china
- Large footprint to cover old caulk lines
- Washdown flushing action
- 3/4" I.P.S. rear spud inlet
- Vandal resistant strainer assembly included
- 2" NPT outlet flange
- All mounting hardware included
- Integral flushing rim
- 100% factory flush tested
- Compliant to the applicable sections of ASME A112.19.2/CSA B45.1
- Carrier not included

DOWNLOADS

- [SU 1200/1210 Series Installation Instructions](#)
- [SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide](#)


COMPLIANCES & CERTIFICATIONS


(ADA Compliant, CalGreen Compliant, CEC Compliant, cUPC Green Certified, EPD, HPD, WaterSense Listed)

NOTES

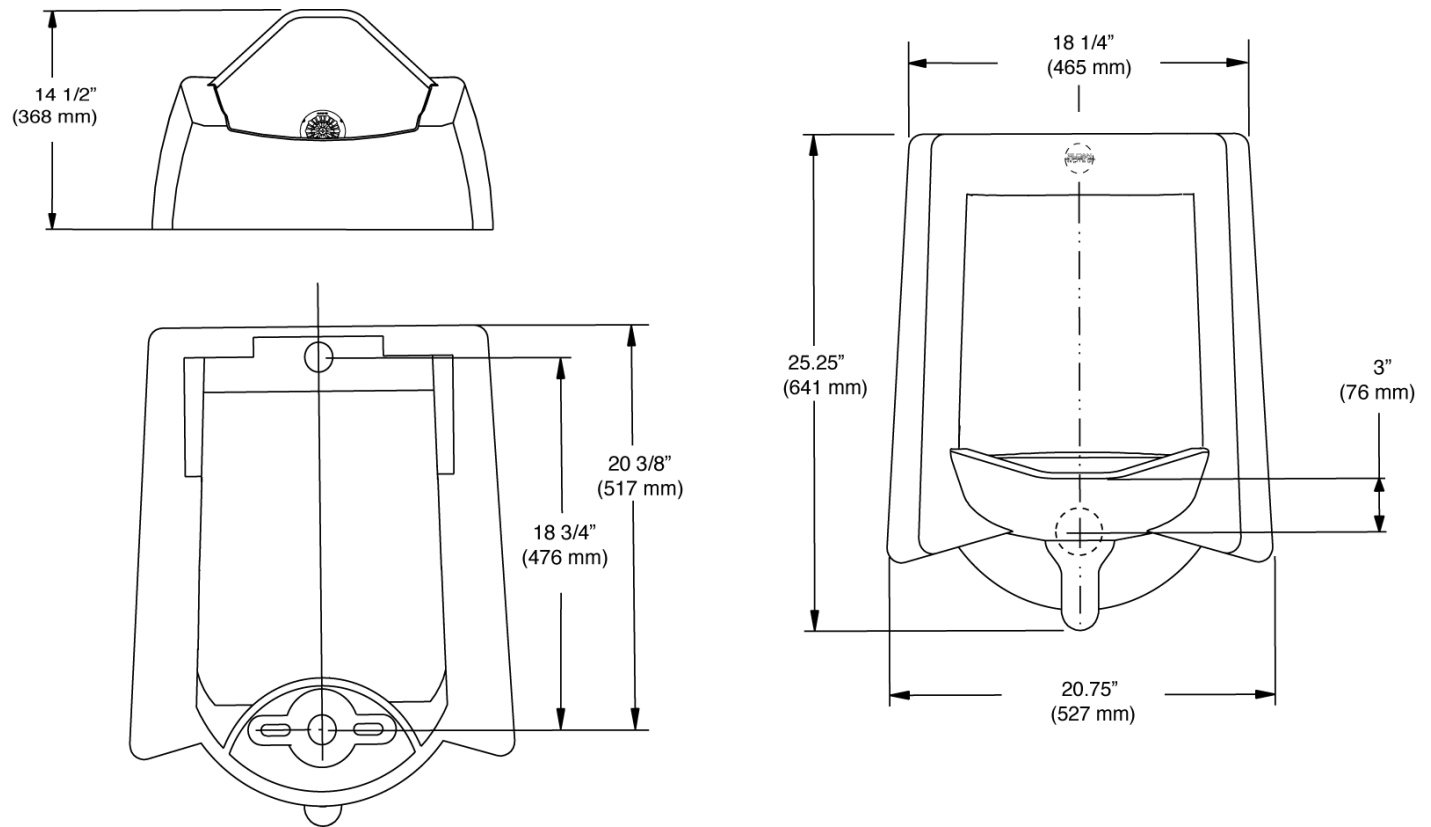
All information contained within this document subject to change without notice.

All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

WaterSense compliant when used with a WaterSense compliant flushometer.

[Find a compatible flushometer](#) for this urinal.

WARRANTY
[View Warranty Information](#)

ROUGH-IN


NOTE: ADA urinal rim height requirements allow all heights 17" and below. Sloan strongly recommends roughing in the drain to achieve a 16 1/2" rim height or less to ensure compliance.