SLOAN.

CODE NUMBER

12051004

DESCRIPTION

SU-1209 Urinal and GEM-2 186 Flushometer.

COMPONENTS

- Flushometer: Code 3072609
- Urinal: Code 1101209
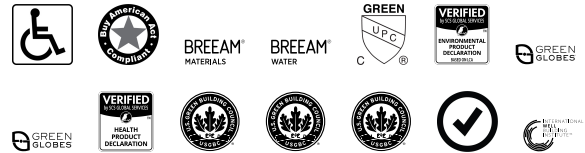
DETAILS

- Flush Volume: 0.5 gpf (1.9 Lpf)
- Nominal Dimensions: 14 ½" × 20 ¾" × 25 ¼" (368 × 527 × 641mm)

FLUSHOMETER FEATURES

- Fixed Volume Piston with Filtered O-ring Bypass
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- ¾" I.P.S. Screwdriver Bak-Chek® Angle Stop with Control Stop Plug
- Vacuum Breaker Flush Connection
- Spud Coupling, Wall and Spud Flanges for ¾" Top Spud
- Cast Wall Flange with Set Screw
- Sweat Solder Adapter with Cover Tube
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- Handle Packing, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance

FIXTURE FEATURES

- White Vitreous China
- Large footprint to cover old caulk lines
- Washdown flushing action
- Integral flushing rim
- ¾" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested

COMPLIANCES & CERTIFICATIONS

(ADA Compliant, BAA Compliant, BREEAM Materials Credit, BREEAM Water Credit, cUPC Green Certified, EPD, Green Globes Materials & Resources Credit, Green Globes Water Credit, HPD, LEED Materials & Resources EPD Credit, LEED Materials & Resources HPD Credit, LEED V4 Water Efficiency Credit, Satisfies LEED Credits, WELL Building Standard)

DOWNLOADS

- Retrofit Urinal Installation Instructions
- GEM/GEM 2 Piston Type Exposed Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Additional Downloads

NOTES

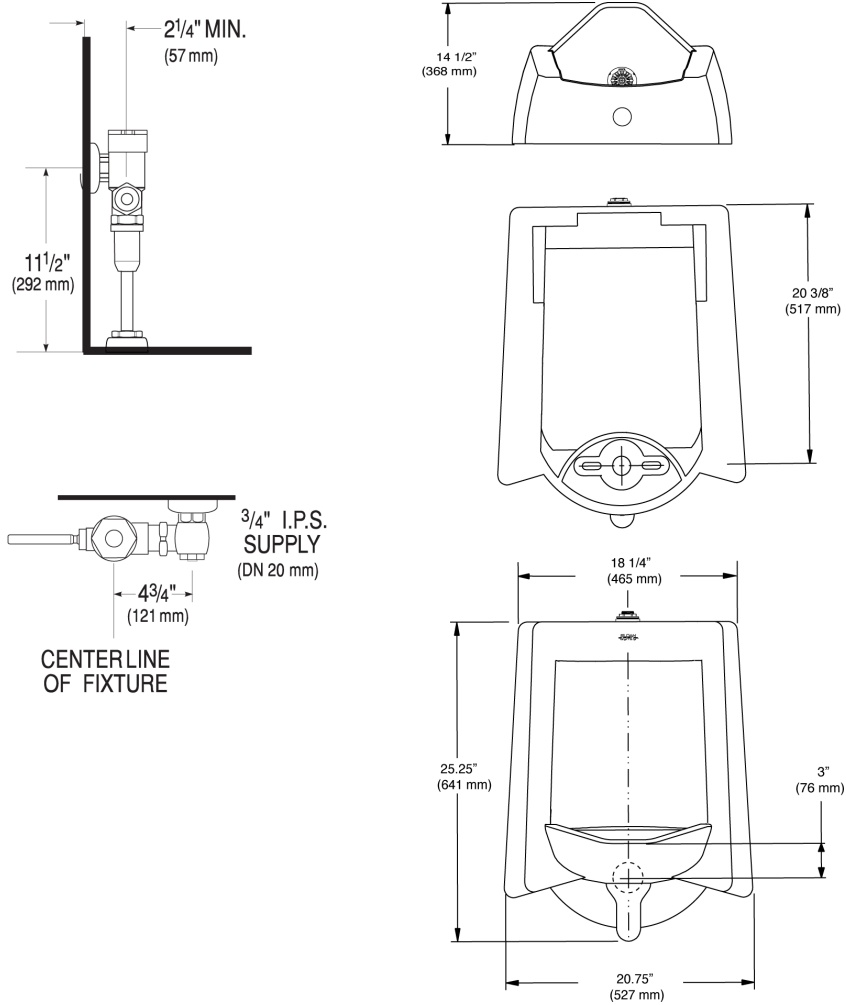All information contained within this document subject to change without notice.

WARRANTY

View Warranty Information

Sloan 10500 Seymour Ave, Franklin Park, IL 60131
Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

ROUGH-IN

2¹/₄" MIN.
(57 mm)

11¹/₂"
(292 mm)

14 1/2"
(368 mm)

20 3/8"
(517 mm)

3/4" I.P.S.
SUPPLY
(DN 20 mm)

4³/₄"
(121 mm)

CENTER LINE
OF FIXTURE

18 1/4"
(465 mm)

25.25"
(641 mm)

3"
(76 mm)

20.75"
(527 mm)