

CODE NUMBER

12051020

DESCRIPTION

SU-1205 Urinal and CROWN 186 Flushometer.

COMPONENTS

Flushometer: Code 3122626Urinal: Code 1101205

DETAILS

• Flush Volume: 0.5 gpf (1.9 Lpf)

• Nominal Dimensions: 14 ½" \times 20 ¾" \times 25 ¼" (368 \times 527 \times 641mm)

FLUSHOMETER FEATURES

- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Fixed Volume Piston with Filtered O-ring Bypass
- Sweat Solder Adapter with Cover Tube and Cast Set Screw Wall Flange
- Handle Packing, Main Seat, Stop Seat and Vacuum Breaker molded from PERMEX® Rubber Compound for Chloramine Resistance
- Valve designed to accept Low and Ultra-Low Consumption Pistons only to ensure Water Conservation
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap

FIXTURE FEATURES

- Wall hung vitreous top spud china
- Large footprint to cover old caulk lines
- Washdown flushing action
- 3/4" I.P.S. top spud inlet
- 2" NPT outlet flange
- All mounting hardware included
- Integral flushing rim
- 100% factory flush tested
- Carrier not included



COMPLIANCES & CERTIFICATIONS





















(ADA Compliant, BAA Compliant, BREEAM Water Credit, cUPC Green Certified, EPD, Green Globes Water Credit, HPD, LEED V4 Water Efficiency Credit, Satisfies LEED Credits, WELL Building Standard)

DOWNLOADS

- Retrofit Urinal Installation Instructions
- Crown Piston Type Exposed Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Additional Downloads

NOTES

All information contained within this document subject to change without notice.


WARRANTY


View Warranty Information


Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



ROUGH-IN





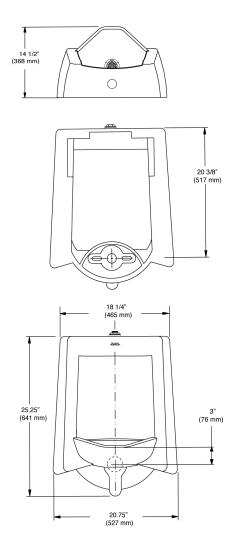

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com