

## DESCRIPTION

SloanStone® Solid Surface 3-Station Wall-Mounted Gradient Sink.

## DETAILS

- Material: SloanStone Solid Surface
- Width: 90" (2,286mm)
- Height: 5" (127mm)

## FEATURES


Three Station Lavatory System with the following features:

- Dimensions: 90" x 22" x 5"
- Angle Brackets or Stainless Steel Enclosure
- A monolithic deck fabricated from SloanStone® solid surface
- Available in 25 colors
- Multiple mounting options
- Pairs great with Sloan faucets and soap dispensers

*SloanStone sinks are one piece molded design with a slight angle outward at the side aprons to facilitate the fabrication process thus the overall length of the sink measured along the bottom edge may be up to ½" greater than noted length. SloanStone sinks are commonly available in one to four station lengths (most models) and cannot be seamed together to create a longer sink layout.*

*Please note that scratches on dark, high gloss finishes may be noticeable and require periodic refinishing to maintain the glossy appearance. Take care placing and sliding objects that may scratch the surface.*

## COLORS

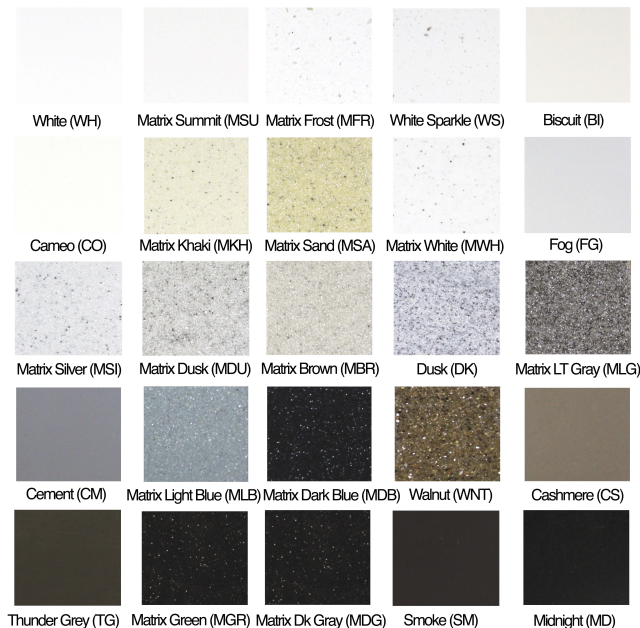

## COMPLIANCES & CERTIFICATIONS



(ADA Compliant, cUPC Certified)

## RECOMMENDED SPECIFICATION

SloanStone Series Sink model no. ELGR 8X000 Gradient Style Sink. Product to be molded using SloanStone solid surface. Sloan automated sensor faucet. Sloan sensor operated foam soap dispenser. Sink design to be ADA compliant and IAPMO certified. Supplied with either angle brackets or enclosure.

## DOWNLOADS

- [ELGR-80000 Series Installation Instructions](#)
- [ELGR-80000 Series Repair and Maintenance Guide](#)
- [Additional Downloads](#)

## NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the ELGR-83000 product? [View the general spec sheet with all options.](#)

[Find a compatible faucet](#) for this sink.

[Find a matching soap dispenser](#) for this sink.



## WARRANTY

[View Warranty Information](#)


**Sloan 10500 Seymour Ave, Franklin Park, IL 60131**

Phone: 800.982.5839 • Fax: 800.447.8329 • [sloan.com](http://sloan.com)

**SUGGESTED FAUCETS**


	Name	Description
	EAF-150	<a href="#">View more info</a>
	EAF-100	<a href="#">View more info</a>

**SUGGESTED SOAP DISPENSERS**

	Name	Description
	ESD-1500	<a href="#">View more info</a>

**ROUGH-IN**


### Rough-In (Three Station); Bracket Mounting Option

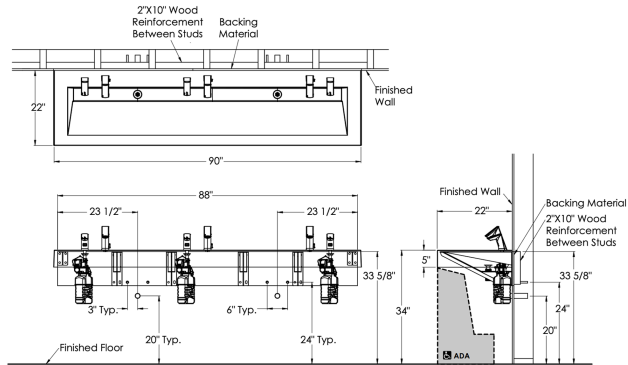

**Notes:**

1. Backing material should equal thickness of drywall, 1/2" min.
2. Mount brackets to allow clearance for plumbing, optimal spacing between all brackets is  $18" \pm 3"$ .

### Rough-In (Three Station); Enclosure Mounting Option

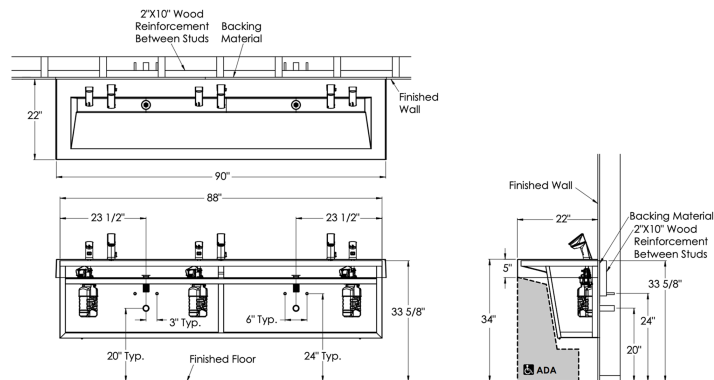

**Notes:**

1. Backing material should equal thickness of drywall, 1/2" min.
2. Position the ESD 500 pump assembly as shown.

**Sloan 10500 Seymour Ave, Franklin Park, IL 60131**

Phone: 800.982.5839 • Fax: 800.447.8329 • [sloan.com](http://sloan.com)