

#### **CODE NUMBER**

24521002

#### **DESCRIPTION**

ST-2459 Water Closet and WES 111 Flushometer.

#### **COMPONENTS**

Flushometer: Code 3720000Water Closet: Code 2102459

#### **DETAILS**

• Flush Volume: 1.6/1.1 gpf (6.0/4.2 Lpf)

Nominal Dimensions: 26 <sup>3</sup>/<sub>4</sub>" × 15" × 13 <sup>1</sup>/<sub>4</sub>" (679 × 381 × 337mm)

## **FLUSHOMETER FEATURES**

- Lifting Handle UP initiates reduced flush (1.1 gpf/4.2 Lpf), eliminating liquid and paper waste, saving a 1/2-gallon of water
- Pushing Handle DOWN initiates full flush (1.6 gpf/6.0 Lpf), eliminating all waste
- Reduces water volume by up to 30% when activated UPWARDS
- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- ADA Metal Non-Hold-Open Handle with Triple Seal Handle Packing
- Sweat Solder Adapter with Cover Tube & Cast Wall Flange with Set Screw
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance
- Includes two (2) adhesive backed Metal Wall Plates etched with Instructions

# **FIXTURE FEATURES**

- White Vitreous China
- Elongated bowl
- Wall mounted, wall outlet
- Siphon jet flushing action achieves 1000g Map score when used with any Sloan flushometer
- Static load rating of 750 lbs (see Notes)
- Water spot area: 101/8" x 93/8" (26 cm x 24 cm)
- 1½" I.P.S. top spud inlet
- 21/8" fully glazed trapway
- Toilet seat not included
- Static load rating of 750 lbs. (See Notes)



## **COMPLIANCES & CERTIFICATIONS**





















(BAA Compliant, BREEAM Materials Credit, BREEAM Water Credit, Carbon Neutral, EPD, Green Globes Materials & Resources Credit, Green Globes Water Credit, HPD, LEED Materials & Resources EPD Credit, LEED Materials & Resources HPD Credit, WELL Building Standard)

### **DOWNLOADS**

- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Additional Downloads

## **NOTES**

All information contained within this document subject to change without notice.


Static load tested according to the procedure outlined in Section 6.7 of ASME A112.19.2. Not recommended for bariatric


### WARRANTY

**View Warranty Information** 



## **ROUGH-IN**



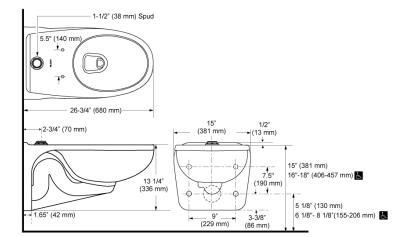

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com