

#### **CODE NUMBER**

3315047BT

#### DESCRIPTION

Bluetooth, 8" Trim Plate, Battery Power Supply, Back-Check Tee, Polished Chrome Finish, 0.5 gpm, Multi-Laminar Spray, Infrared Sensor, Optima® Battery or Turbine-Powered Deck-Mounted Mid Body Faucet.

## **DETAILS**

• Flow Rate: 0.5 gpm (1.9 Lpm) (0.5GPM) • Spray Type: Multi-Laminar (MLM)

 Sensor Type: Infrared Mounting Type: Single Hole

• Mounting Size: Single Hole 1-1/4" to 1-1/2"

• Trim Plate: 8" (203mm) (8) • Power Supply: Battery (BAT)

• Temperature Mixer: Back-Check Tee (TEE)

• Finish: Polished Chrome (CP)

• Factory Default Timeout: 30 seconds • Factory Default Gallons per Cycle: 0.25

## **FEATURES**

ADA Compliant, Water Usage and Battery Strength Reporting, Wireless Settings Adjustment, Commercial Grade Faucet, Integrated Water Shut-off, Hygienic Line Flush, On-demand or Metered Activation, Self-adapting Sensor, Cast Brass Spout, Quick Connect **Fittings** 

#### **ELECTRICAL SPECIFICATIONS**

• Battery Life: 3 years 8,000 cycles/month Optional power harvesting significantly extends service life

• Sensor Range: 4"-5" (102-127mm) • Timeout Adjustment Settings: 30s

## **POWER SUPPLY OPTIONS**

- 6VDC Plug Adapter (sold separately), 0362006\*
- 6VDC Ganged Adapter Kit (up to 6 units)(sold separately), 0362035\*
- 24VAC Box Transformer (up to 3 units)(sold separately), 0345370PK\*
- Optional Turbine Energy Harvesting
- \* when converting units to hardwired with battery back-up


## **VIDEOS**


Sloan Connect App®

Sloan Optima Below Deck Faucet

## **DOWNLOADS**

- Optima Smart Faucet Below Deck Installation Instructions
- ETF-80/880 and EBF-85/187 Below Deck Repair and Maintenance Guide
- Faucet Spray Heads Repair and Maintenance Guide





# **COMPLIANCES & CERTIFICATIONS**

































(ADA Compliant, ASME A112.18.1 Compliant, CalGreen Compliant, CEC Compliant, cUPC Certified, cUPC Low Lead Compliant, EPD, GPC 0.25 or less, HPD, IAPMO, NSF-61, NYC604.4, Proposition 65, TAS, UPC Certified, UPC Low Lead Compliant, WaterSense Listed, WELL Building Standard)

## RECOMMENDED SPECIFICATION

Faucet shall include cast brass body, quick-connect fittings, twist-off/shut-off solenoid assembly, removable battery cartridge, flexible power supply and allow adjustment of settings wirelessly via Apple or Android smartphones.

## **NOTES**

All information contained within this document subject to change without notice.

Looking for other variations of the EBF-85 product? View the general spec sheet with all options.

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



# OPTIMA® SENSOR FAUCET EBF-85-8-BAT-TEE-CP-0.5GPM-MLM-FCT

- Trim Plate Guide
- Additional Downloads


Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

## WARRANTY

View Warranty Information



## **ROUGH-IN**

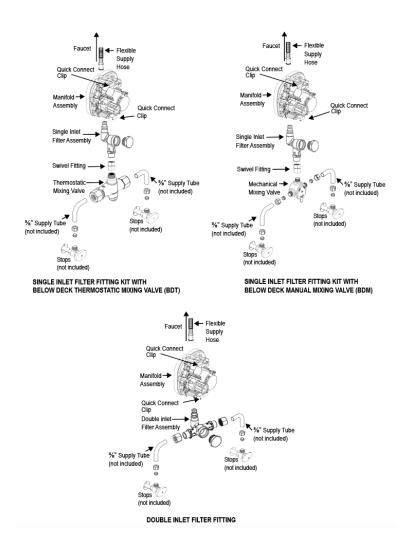

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com