

### **CODE NUMBER**

33621008

## **DESCRIPTION**

4" Trim Plate, Plug Adapter Power Supply, Below Deck Manual Mixing Valve, Polished Chrome Finish, 0.35 gpm, Multi-Laminar Spray, Infrared Sensor, Sloan® Hardwired-Powered Deck-Mounted Mid Body Faucet.

### **DETAILS**

• Flow Rate: 0.35 gpm (1.3 Lpm) (0.35GPM)

• Spray Type: Multi-Laminar (MLM)

Spout Type: Pedestal
Sensor Type: Infrared
Mounting Type: Single Hole
Trim Plate: 4" (102mm) (4)
Power Supply: Plug Adapter (PLG)

• Temperature Mixer: Below Deck Manual Mixing Valve (BDM)

Finish: Polished Chrome (CP)
 Factory Default Timeout: 30 seconds
 Factory Default Gallons per Cycle: 0.175

## **FEATURES**

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Brass Gooseneck Hand Washing Faucet with the following features:

• Adjustable Infrared Sensor Range

• 36" (914 mm) Long Sensor Cable

• 24" (610 mm) Long Flex Hose

• Filtered Solenoid Valve with serviceable Strainer Filter

• Includes Four (4) AA-size Batteries

• Includes appropriate Mounting Hardware

## **ELECTRICAL SPECIFICATIONS**

• Battery Life: 2 years 8,000 cycles/month

• Timeout Adjustment Settings: 30s

## **DOWNLOADS**

• SF Series Installation Instructions

• SF Series (FR) Installation Instructions

• SF Series (SP) Installation Instructions


• SFP 35-A Installation Instructions

• Trim Plate Guide

• SF 2900/2950 Repair and Maintenance Guide

• Additional Downloads





# **COMPLIANCES & CERTIFICATIONS**



(ADA Compliant, ASME A112.18.1 Compliant, BREEAM Water Credit, CalGreen Compliant, CEC Compliant, cUPC Certified, cUPC Low Lead Compliant, GPC 0.25 or less, Green Globes Water Credit, IAPMO, LEED V4 Water Efficiency Credit, NSF-61, NYC604.4, Proposition 65, Satisfies LEED Credits, TAS, UPC Certified, UPC Low Lead Compliant, WaterSense Listed, WELL Building Standard)

## RECOMMENDED SPECIFICATION

Faucet shall include cast brass body, plug adapter, Alkaline batteries for backup power, Below deck manual mixing valve and 0.35gpm multilaminar spray head.

## **NOTES**

All information contained within this document subject to change without notice.

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



# SLOAN® SENSOR FAUCET SF-2900-4-PLG-BDM-CP-0.35GPM-MLM-FCT

Looking for other variations of the SF-2900 product? View the general spec sheet with all options.


Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

## **WARRANTY**

View Warranty Information



## **ROUGH-IN**

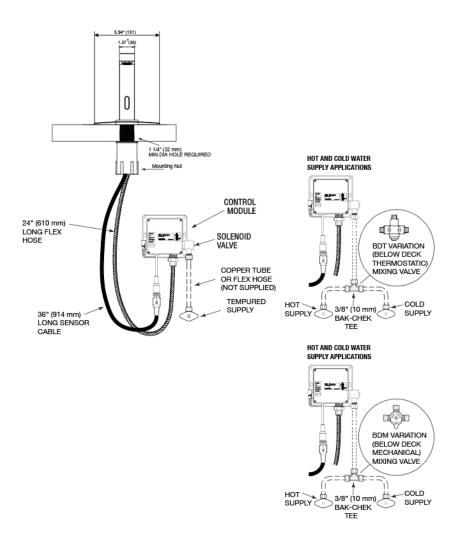

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com