

OPTIMA® SENSOR FAUCET ETF-600-HLT-TEE-SF-0.5GPM-MLM-FCT

(General Model Name: ETF600-LT PVDSF ELECTRONIC FAUCET)
Discontinued

CODE NUMBER

3365123BT

DESCRIPTION

Bluetooth, Hardwired Less Transformer Power Supply, Back-Check Tee, Brushed Stainless Finish, 0.5 gpm, Multi-Laminar Spray, Infrared Sensor, Optima® Hardwired-Powered Deck-Mounted Low Integrated Base Body Faucet.

DETAILS

- Flow Rate: 0.5 gpm (1.9 Lpm) (0.5GPM)
- Spray Type: Multi-Laminar (MLM)
- Sensor Type: Infrared
- Mounting Type: 4" Centerset
- Mounting Size: 4" Centerset, (3-hole) 1-1/4" to 1-1/2"
- Power Supply: Hardwired Less Transformer (HLT)
- Temperature Mixer: Back-Check Tee (TEE)
- Finish: Brushed Stainless (SF)
- Factory Default Timeout: 30 seconds
- Factory Default Gallons per Cycle: 0.25

FEATURES

Commercial Grade Faucet, ADA Compliant, Cast Brass Spout, Quick Connect Fittings, Integrated Water Shut-off, Wireless Settings Adjustment, On-demand or Metered activation, Hygienic Line Flush, Water Usage and Battery Strength Reporting, Self-adapting Sensor

ELECTRICAL SPECIFICATIONS

- Battery Life: 3 years 8,000 cycles/month
 Optional power harvesting significantly extends service life
- Sensor Range: 4"-5" (102-127mm)
- Timeout Adjustment Settings: 30s

POWER SUPPLY OPTIONS

- 6VDC Plug Adapter (included with PLG models), 0362006
- 6VDC Ganged Adapter Kit (up to 6 units)(sold separately), 0362035*
- 24VAC Box Transformer (included with BOX models), 0345370PK
- * when converting units to hardwired with battery back-up

VIDEOS


- Sloan Connect App®
- Sloan Optima Below Deck Faucet
- PVD Special Finishes

DOWNLOADS

- Optima Smart Faucet Below Deck Installation Instructions
- Trim Plate Guide
- Faucet Spray Heads Repair and Maintenance Guide
- ETF-600/EBF-650 Below Deck Repair and Maintenance Guide



Variation not shown: Brushed Stainless

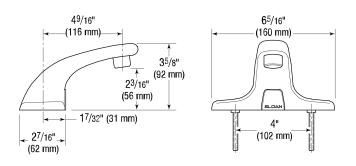

COMPLIANCES & CERTIFICATIONS



(ADA Compliant, ASME A112.18.1 Compliant, CalGreen Compliant, CEC Compliant, cUPC Certified, cUPC Low Lead Compliant, EPD, GPC 0.25 or less, HPD, IAPMO, NSF-61, NYC604.4, Proposition 65, TAS, UPC Certified, UPC Low Lead Compliant, WaterSense Listed, WELL Building Standard)

NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the ETF-600 product? View the general spec sheet with all options.

Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

WARRANTY

View Warranty Information

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



OPTIMA® SENSOR FAUCET ETF-600-HLT-TEE-SF-0.5GPM-MLM-FCT

(General Model Name: ETF600-LT PVDSF ELECTRONIC FAUCET)
Discontinued

Additional Downloads




OPTIMA® SENSOR FAUCET ETF-600-HLT-TEE-SF-0.5GPM-MLM-FCT

(General Model Name: ETF600-LT PVDSF ELECTRONIC FAUCET)
Discontinued


ROUGH-IN

ETF-600 Faucet with Bak-Chek[®] Tee for Hot and Cold Water Supply

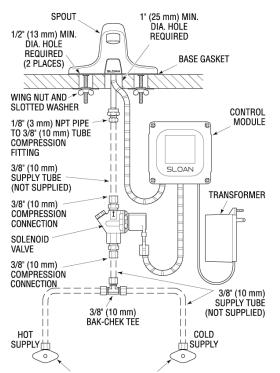

3/8" (10 mm) COMPRESSION STOPS (NOT SUPPLIED)

ETF-600 Faucet with BDM and BDT Variation Mixing Valves for Hot and Cold Water Supply

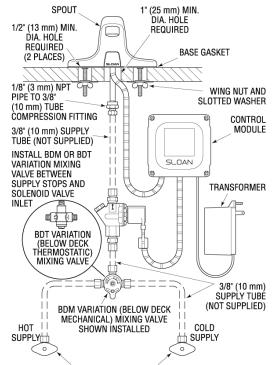

3/8" (10 mm) COMPRESSION STOPS (NOT SUPPLIED)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com