

### **CODE NUMBER**

3365218BT

### DESCRIPTION

Bluetooth, 4" Trim Plate, Box Transformer Power Supply, Below Deck Manual Mixing Valve, Polished Chrome Finish, 2.2 gpm, Laminar Spray, Infrared Sensor, Optima® Hardwired-Powered Deck-Mounted Gooseneck Body Faucet.

### **DETAILS**

• Flow Rate: 2.2 gpm (8.3 Lpm) (2.2GPM)

Spray Type: Laminar (LAM)
Spout Type: Surgical Bend (S)
Sensor Type: Infrared
Mounting Type: Single Hole

• Mounting Size: Single Hole 1-1/4" to 1-1/2"

• Trim Plate: 4" (102mm) (4)

Power Supply: Box Transformer (BOX)

• Temperature Mixer: Below Deck Manual Mixing Valve (BDM)

• Finish: Polished Chrome (CP)

Factory Default Timeout: 30 secondsFactory Default Gallons per Cycle: 1.1

#### **FEATURES**

ADA Compliant, Water Usage and Battery Strength Reporting, Wireless Settings Adjustment, Commercial Grade Faucet, Integrated Water Shut-off, Hygienic Line Flush, On-demand or Metered Activation, Self-adapting Sensor, Cast Brass Spout, Quick Connect Fittings

## **ELECTRICAL SPECIFICATIONS**

Battery Life: 3 years 8,000 cycles/month
Optional power harvesting significantly extends service life

Sensor Range: 8"-10" (203-254mm)Timeout Adjustment Settings: 30s

### **POWER SUPPLY OPTIONS**

• 6VDC Plug Adapter (included with PLG models), 0362006

 6VDC Ganged Adapter Kit (up to 6 units)(sold separately), 0362035\*

• 24VAC Box Transformer (included with BOX models), 0345370PK

\* when converting units to hardwired with battery back-up

### **VIDEOS**


Sloan Connect App®

Sloan Optima Below Deck Faucet

# DOWNLOADS

- Optima Smart Faucet Below Deck Installation Instructions
- Trim Plate Guide
- Faucet Spray Heads Repair and Maintenance Guide
- ETF-700/700-S and EBF-750/750-S Below Deck Repair and Maintenance Guide





### **COMPLIANCES & CERTIFICATIONS**



ASME























(ADA Compliant, ASME A112.18.1 Compliant, cUPC Certified, cUPC Low Lead Compliant, EPD, HPD, IAPMO, NSF-61, Proposition 65, TAS, UL Certified, UPC Certified, UPC Low Lead Compliant, WaterSense Listed, WELL Building Standard)

### RECOMMENDED SPECIFICATION

Faucet shall include cast brass body, quick-connect fittings, twist-off/shut-off solenoid assembly, removable battery cartridge, flexible power supply and allow adjustment of settings wirelessly via Apple or Android smartphones.





• Additional Downloads

## **NOTES**

All information contained within this document subject to change without notice.

Looking for other variations of the ETF-700 product? View the general spec sheet with all options.


Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

## **WARRANTY**

View Warranty Information



## **ROUGH-IN**

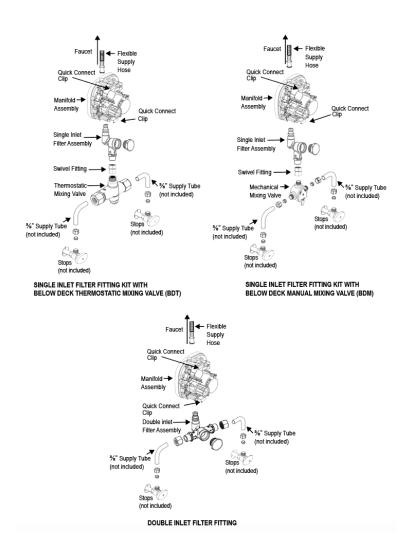

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com