

Discontinued



CODE NUMBER

3365235

DESCRIPTION

Plug Adapter Power Supply, Below Deck Thermostatic Mixing Valve, Polished Chrome Finish, 2.2 gpm, Laminar Spray, Infrared Sensor, Optima® Hardwired-Powered Wall-Mounted Gooseneck Body Faucet.

DETAILS

• Flow Rate: 2.2 gpm (8.3 Lpm) (2.2GPM)

Spray Type: Laminar (LAM)Sensor Type: InfraredMounting Type: Single Hole

Mounting Size: Single Hole 1"Power Supply: Plug Adapter (PLG)

• Temperature Mixer: Below Deck Thermostatic Mixing Valve (BDT)

• Finish: Polished Chrome (CP)

Factory Default Timeout: 30 secondsFactory Default Gallons per Cycle: 1.1

FEATURES

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Brass Gooseneck Hand Washing Faucet with the following features:

- Sensor Range Adjustment Screw
- Troubleshooting LED Indicator Lights
- User friendly Variable Time Out Settings
- Metal Jacketed Wire Protection for Sensor and Solenoid Leads
- Modular Quick-Release Sensor and Solenoid Connections
- Filtered Solenoid Valve with serviceable Strainer Filter

ELECTRICAL SPECIFICATIONS

- Battery Life: 3 years 8,000 cycles/month
 Optional power harvesting significantly extends service life
- Sensor Range: 4"-5" (102-127mm)
 Timeout Adjustment Settings: 30s

POWER SUPPLY OPTIONS

- 6VDC Plug Adapter (included with PLG models), 0362006
- 6VDC Ganged Adapter Kit (up to 6 units)(sold separately), 0362035
- 24VAC Box Transformer (included with BOX models), 0345370PK

VIDEOS


Sloan Connect App®

Sloan Optima Below Deck Faucet

DOWNLOADS

- Optima Smart Faucet Below Deck Installation Instructions
- Trim Plate Guide
- Faucet Spray Heads Repair and Maintenance Guide





COMPLIANCES & CERTIFICATIONS





























(ADA Compliant, ASME A112.18.1 Compliant, ASSE 1070, cUPC Certified, cUPC Low Lead Compliant, EPD, HPD, IAPMO, NSF-61, Proposition 65, TAS, UL Certified, UPC Certified, UPC Low Lead Compliant, WaterSense Listed, WELL Building Standard)

NOTES

All information contained within this document subject to change without notice.



OPTIMA® SENSOR FAUCET ETF-500-PLG-BDT-CP-2.2GPM-LAM-FCT

(General Model Name: ETF500-P-BDT CP ELECTRONIC FAUCET)

Discontinued

- ETF-500/500-S and EBF-550/550-S Below Deck Repair and Maintenance Guide
- Additional Downloads

Looking for other variations of the ETF-500 product? View the general spec sheet with all options.

Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

WARRANTY

View Warranty Information









ROUGH-IN

ETF-500 Faucet with Bak-Chek® Tee for Hot and Cold Water Supply

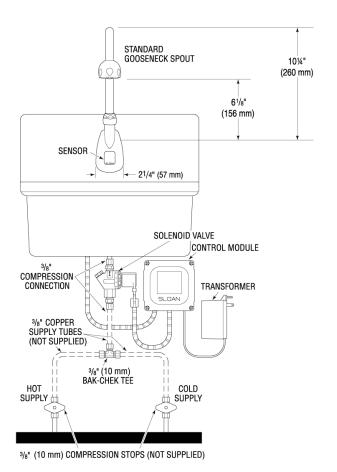

ETF-500 Faucet with BDM and BDT Variation Mixing Valves for Hot and Cold Water Supply

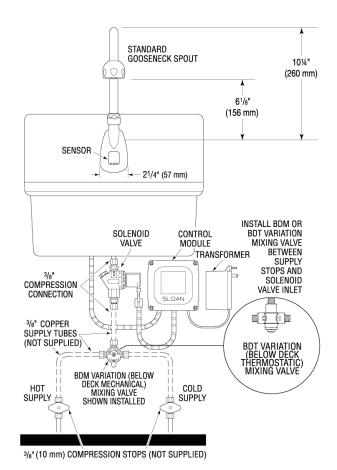

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com