

# OPTIMA® SENSOR FAUCET ETF-600-HLT-BDM-CP-0.5GPM-MLM-FCT

(General Model Name: ETF600-LT-BDM CP ELECTRONIC FAUCET) Discontinued

# CODE NUMBER

3365326BT

### DESCRIPTION

Bluetooth, Trim Plate: None, Hardwired Less Transformer Power Supply, Below Deck Manual Mixing Valve, Polished Chrome Finish, 0.5 gpm, Multi-Laminar Spray, Infrared Sensor, Optima® Hardwired-Powered Deck-Mounted Low Integrated Base Body Faucet.

## DETAILS

- Flow Rate: 0.5 gpm (1.9 Lpm) (0.5GPM)
- Spray Type: Multi-Laminar (MLM)
- Sensor Type: Infrared
- Mounting Type: 4" Centerset
- Mounting Size: 4" Centerset, (3-hole) 1-1/4" to 1-1/2"
- Trim Plate: None
- Power Supply: Hardwired Less Transformer (HLT)
- Temperature Mixer: Below Deck Manual Mixing Valve (BDM)
- Finish: Polished Chrome (CP)
- Factory Default Timeout: 30 seconds
- Factory Default Gallons per Cycle: 0.25

#### FEATURES

ADA Compliant, Water Usage and Battery Strength Reporting, Wireless Settings Adjustment, Commercial Grade Faucet, Integrated Water Shut-off, Hygienic Line Flush, On-demand or Metered Activation, Self-adapting Sensor, Cast Brass Spout, Quick Connect Fittings

# **ELECTRICAL SPECIFICATIONS**

- Battery Life: 3 years 8,000 cycles/month
  Optional power harvesting significantly extends service life
- Sensor Range: 4"-5" (102-127mm)
- Timeout Adjustment Settings: 30s

#### **POWER SUPPLY OPTIONS**

- 6VDC Ganged Adapter Kit (up to 6 units)(sold separately), 0362035\*
- 6VDC Plug Adapter (included with PLG models), 0362006
- 24VAC Box Transformer (included with BOX models), 0345370PK
- \* when converting units to hardwired with battery back-up


## VIDEOS

- Sloan Connect App®
- Sloan Optima Below Deck Faucet
- PVD Special Finishes

# DOWNLOADS

- Optima Smart Faucet Below Deck Installation Instructions
- Trim Plate Guide
- Faucet Spray Heads Repair and Maintenance Guide





# **COMPLIANCES & CERTIFICATIONS**



(ADA Compliant, ASME A112.18.1 Compliant, CalGreen Compliant, CEC Compliant, cUPC Certified, cUPC Low Lead Compliant, EPD, GPC 0.25 or less, HPD, IAPMO, NSF-61, NYC604.4, Proposition 65, TAS, UPC Certified, UPC Low Lead Compliant, WaterSense Listed, WELL Building Standard)

# NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the ETF-600 product? View the general spec sheet with all options.

Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

#### WARRANTY

View Warranty Information

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



# OPTIMA® SENSOR FAUCET ETF-600-HLT-BDM-CP-0.5GPM-MLM-FCT (General Model Name: ETF600-LT-BDM CP ELECTRONIC FAUCET) Discontinued

- ETF-600/EBF-650 Below Deck Repair and Maintenance Guide
- Additional Downloads




# OPTIMA® SENSOR FAUCET ETF-600-HLT-BDM-CP-0.5GPM-MLM-FCT

(General Model Name: ETF600-LT-BDM CP ELECTRONIC FAUCET) Discontinued


#### **ROUGH-IN**

# ETF-600 Faucet with Bak-Chek<sup>®</sup> Tee for Hot and Cold Water Supply

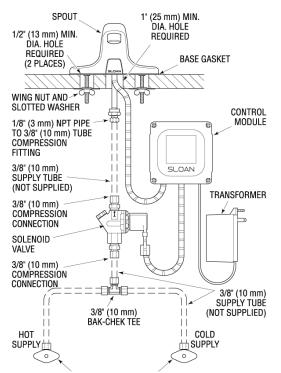

3/8" (10 mm) COMPRESSION STOPS (NOT SUPPLIED)

# ETF-600 Faucet with BDM and BDT Variation Mixing Valves for Hot and Cold Water Supply

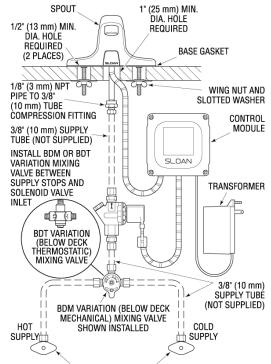

3/8" (10 mm) COMPRESSION STOPS (NOT SUPPLIED)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com