

OPTIMA® SENSOR FAUCET ETF-600-8-HLT-BDM-CP-0.5GPM-MLM-FCT

(General Model Name: ETF600-8-LT-BDM CP ELECTRONIC FAUCET) **Discontinued**

CODE NUMBER

3365329BT

DESCRIPTION

Bluetooth, 8" Trim Plate, Hardwired Less Transformer Power Supply, Below Deck Manual Mixing Valve, Polished Chrome Finish, 0.5 gpm, Multi-Laminar Spray, Infrared Sensor, Optima® Hardwired-Powered Deck-Mounted Low Integrated Base Body Faucet.

DETAILS

• Flow Rate: 0.5 gpm (1.9 Lpm) (0.5GPM) • Spray Type: Multi-Laminar (MLM)

Sensor Type: Infrared

Mounting Type: 4" Centerset

• Mounting Size: 4" Centerset, (3-hole) 1-1/4" to 1-1/2"

• Trim Plate: 8" (203mm) (8)

Power Supply: Hardwired Less Transformer (HLT)

• Temperature Mixer: Below Deck Manual Mixing Valve (BDM)

• Finish: Polished Chrome (CP)

• Factory Default Timeout: 30 seconds • Factory Default Gallons per Cycle: 0.25

FEATURES

ADA Compliant, Water Usage and Battery Strength Reporting, Wireless Settings Adjustment, Commercial Grade Faucet, Integrated Water Shut-off, Hygienic Line Flush, On-demand or Metered Activation, Self-adapting Sensor, Cast Brass Spout, Quick Connect **Fittings**

ELECTRICAL SPECIFICATIONS

- Battery Life: 3 years 8,000 cycles/month o Optional power harvesting significantly extends service life
- Sensor Range: 4"-5" (102-127mm) • Timeout Adjustment Settings: 30s

POWER SUPPLY OPTIONS

- 6VDC Ganged Adapter Kit (up to 6 units)(sold separately), 0362035*
- 6VDC Plug Adapter (included with PLG models), 0362006
- 24VAC Box Transformer (included with BOX models), 0345370PK
- * when converting units to hardwired with battery back-up

VIDEOS

Sloan Connect App®


Sloan Optima Below Deck Faucet

PVD Special Finishes

DOWNLOADS

- Optima Smart Faucet Below Deck Installation Instructions
- Trim Plate Guide
- Faucet Spray Heads Repair and Maintenance Guide





COMPLIANCES & CERTIFICATIONS



ASME





























(ADA Compliant, ASME A112.18.1 Compliant, CalGreen Compliant, CEC Compliant, cUPC Certified, cUPC Low Lead Compliant, EPD, GPC 0.25 or less, HPD, IAPMO, NSF-61, NYC604.4, Proposition 65, TAS, UPC Certified, UPC Low Lead Compliant, WaterSense Listed, WELL Building Standard)

NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the ETF-600 product? View the general spec sheet with all options.

Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

WARRANTY

View Warranty Information



OPTIMA® SENSOR FAUCET ETF-600-8-HLT-BDM-CP-0.5GPM-MLM-FCT

(General Model Name: ETF600-8-LT-BDM CP ELECTRONIC FAUCET)

Discontinued

- ETF-600/EBF-650 Below Deck Repair and Maintenance Guide
- Additional Downloads




(General Model Name: ETF600-8-LT-BDM CP ELECTRONIC FAUCET)


Discontinued

ROUGH-IN

ETF-600 Faucet with Bak-Chek® Tee for Hot and Cold Water Supply

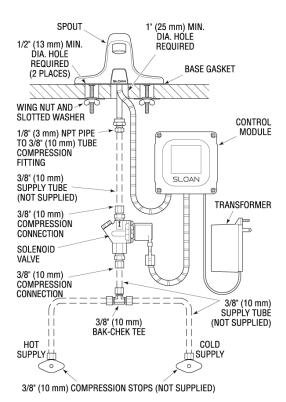

ETF-600 Faucet with BDM and BDT Variation Mixing Valves for Hot and Cold Water Supply

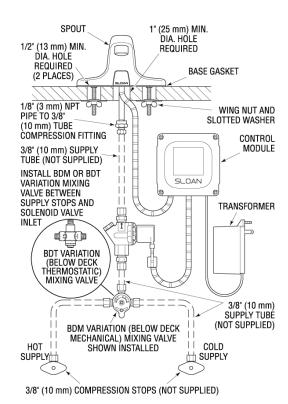

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com