

## OPTIMA® SENSOR FAUCET ETF-600-PLG-BDT-CP-0.5GPM-MLM-WS-FCT

(General Model Name: ETF600WS-P-BDT CP ELECTRONIC FAUCET)
Discontinued

## **CODE NUMBER**

3365400

#### DESCRIPTION

Plug Adapter Power Supply, Below Deck Thermostatic Mixing Valve, Polished Chrome Finish, 0.5 gpm, Multi-Laminar Spray, Infrared Sensor, Optima® Hardwired-Powered Deck-Mounted Low Integrated Base Body Faucet.

## DETAILS

- Flow Rate: 0.5 gpm (1.9 Lpm) (0.5GPM)
- Spray Type: Multi-Laminar (MLM)
- Sensor Type: Infrared
- Mounting Type: 4" Centerset
- Mounting Size: 4" Centerset, (3-hole) 1-1/4" to 1-1/2"
- Power Supply: Plug Adapter (PLG)
- Temperature Mixer: Below Deck Thermostatic Mixing Valve (BDT)
- Finish: Polished Chrome (CP)
- Factory Default Timeout: 30 seconds
- Factory Default Gallons per Cycle: 0.25

#### FEATURES

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Cast Brass 4 Centerset Wash Station Faucet with the following features:

- Splash-proof Circuit Control Module
- Sensor Range Adjustment Screw
- Troubleshooting LED Indicator Lights
- User Friendly Variable Time Out Settings
- Filtered Solenoid Valve with serviceable Strainer Filter
- Vandal Resistant Spray Head with Pressure Compensating Flow Control
- Metal Jacketed Wire Protection for Sensor and Solenoid Leads
- Modular Quick-Release Sensor and Solenoid Connections
- Wash Station Configuration

## **ELECTRICAL SPECIFICATIONS**

- Battery Life: 3 years 8,000 cycles/month
   Optional power harvesting significantly extends service life
- Sensor Range: 4"-5" (102-127mm)
- Timeout Adjustment Settings: 30s

#### **POWER SUPPLY OPTIONS**

- 6VDC Plug Adapter (included with PLG models), 0362006
- 6VDC Ganged Adapter Kit (up to 6 units)(sold separately), 0362035
- 24VAC Box Transformer (included with BOX models), 0345370PK


#### VIDEOS

Sloan Connect App®

Sloan Optima Below Deck Faucet



Variation not shown: Wash Station

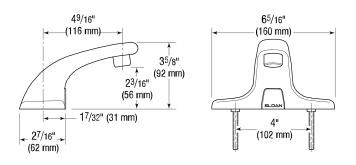

# **COMPLIANCES & CERTIFICATIONS**



(ADA Compliant, ASME A112.18.1 Compliant, ASSE 1070, CalGreen Compliant, CEC Compliant, cUPC Certified, cUPC Low Lead Compliant, EPD, GPC 0.25 or less, HPD, IAPMO, NSF-61, NYC604.4, Proposition 65, TAS, UL Certified, UPC Certified, UPC Low Lead Compliant, WaterSense Listed, WELL Building Standard)

# NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the ETF-600 product? View the general spec sheet with all options.

Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



# OPTIMA® SENSOR FAUCET ETF-600-PLG-BDT-CP-0.5GPM-MLM-WS-FCT (General Model Name: ETF600WS-P-BDT CP ELECTRONIC FAUCET)

Discontinued

PVD Special Finishes

## DOWNLOADS

- Optima Smart Faucet Below Deck Installation Instructions
- Trim Plate Guide
- Faucet Spray Heads Repair and Maintenance Guide
- ETF-600/EBF-650 Below Deck Repair and Maintenance Guide
- Additional Downloads

WARRANTY View Warranty Information




# OPTIMA® SENSOR FAUCET ETF-600-PLG-BDT-CP-0.5GPM-MLM-WS-FCT

(General Model Name: ETF600WS-P-BDT CP ELECTRONIC FAUCET) Discontinued


#### **ROUGH-IN**

# ETF-600 Faucet with Bak-Chek<sup>®</sup> Tee for Hot and Cold Water Supply

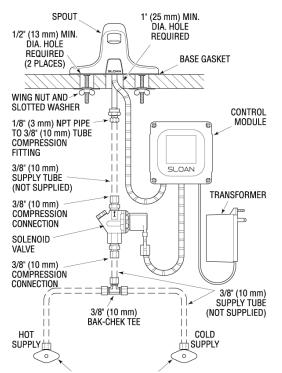

3/8" (10 mm) COMPRESSION STOPS (NOT SUPPLIED)

## ETF-600 Faucet with BDM and BDT Variation Mixing Valves for Hot and Cold Water Supply

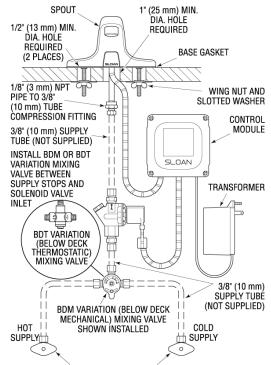

3/8" (10 mm) COMPRESSION STOPS (NOT SUPPLIED)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com