

OPTIMA® SENSOR FAUCET ETF-610-4-HLT-TEE-CP-0.35GPM-MLM-FCT

(General Model Name: ETF610-4-LT CP ELECTRONIC FAUCET 0.35 gpm) Discontinued

CODE NUMBER

3365774BT

DESCRIPTION

Bluetooth, 4" Trim Plate, Hardwired Less Transformer Power Supply, Back-Check Tee, Polished Chrome Finish, 0.35 gpm, Multi-Laminar Spray, Infrared Sensor, Optima® Hardwired-Powered Deck-Mounted Low Body Faucet.

DETAILS

- Flow Rate: 0.35 gpm (1.3 Lpm) (0.35GPM)
- Spray Type: Multi-Laminar (MLM)
- Sensor Type: Infrared
- Mounting Type: Single Hole
- Mounting Size: Single Hole 1-1/4" to 1-1/2"
- Trim Plate: 4" (102mm) (4)
- Power Supply: Hardwired Less Transformer (HLT)
- Temperature Mixer: Back-Check Tee (TEE)
- Finish: Polished Chrome (CP)
- Factory Default Timeout: 30 seconds
- Factory Default Gallons per Cycle: 0.175

FEATURES

ADA Compliant, Water Usage and Battery Strength Reporting, Wireless Settings Adjustment, Commercial Grade Faucet, Integrated Water Shut-off, Hygienic Line Flush, On-demand or Metered Activation, Self-adapting Sensor, Cast Brass Spout, Quick Connect Fittings

ELECTRICAL SPECIFICATIONS

- Battery Life: 3 years 8,000 cycles/month
 Optional power harvesting significantly extends service life
- Sensor Range: 4"-5" (102-127mm)
- Timeout Adjustment Settings: 30s

POWER SUPPLY OPTIONS

- 6VDC Plug Adapter (included with PLG models), 0362006
- 6VDC Ganged Adapter Kit (up to 6 units)(sold separately), 0362035*
- 24VAC Box Transformer (included with BOX models), 0345370PK
- * when converting units to hardwired with battery back-up

VIDEOS

Sloan Connect App®


Sloan Optima Below Deck Faucet

DOWNLOADS

- Optima Smart Faucet Below Deck Installation Instructions
- Trim Plate Guide
- Faucet Spray Heads Repair and Maintenance Guide
- ETF-610/EBF-615 Below Deck Repair and Maintenance Guide



Variation not shown: 4" Trim Plate

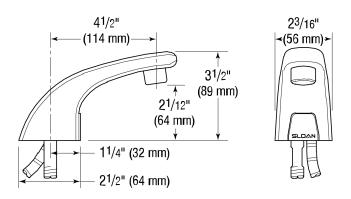

COMPLIANCES & CERTIFICATIONS



(ADA Compliant, ASME A112.18.1 Compliant, CalGreen Compliant, CEC Compliant, cUPC Certified, cUPC Low Lead Compliant, EPD, GPC 0.25 or less, HPD, IAPMO, LEED V4 Water Efficiency Credit, NSF-61, NYC604.4, Proposition 65, Satisfies LEED Credits, TAS, UPC Certified, UPC Low Lead Compliant, WaterSense Listed, WELL Building Standard)

NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the ETF-610 product? View the general spec sheet with all options.

Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



OPTIMA® SENSOR FAUCET ETF-610-4-HLT-TEE-CP-0.35GPM-MLM-FCT

(General Model Name: ETF610-4-LT CP ELECTRONIC FAUCET 0.35 gpm)
Discontinued

Additional Downloads

WARRANTY View Warranty Information



OPTIMA® SENSOR FAUCET ETF-610-4-HLT-TEE-CP-0.35GPM-MLM-FCT

(General Model Name: ETF610-4-LT CP ELECTRONIC FAUCET 0.35 gpm) Discontinued

ROUGH-IN

SPOUT

H۲

日日

滑

48 3/8" (10 mm)

BAK-CHEK TEE

BASE GASKET

SPACER, FLAT WASHER, LOCKWASHER AND NUT

1/4" (6 mm) PIPE TO 3/8" (10 mm) TUBE COMPRESSION FITTING


3/8" (10 mm) SUPPLY TUBE (NOT SUPPLIED)

3/8" (10 mm) – COMPRESSION CONNECTION


3/8" (10 mm) ----Compression Connection

SOLENOID VALVE

HOT SUPPLY

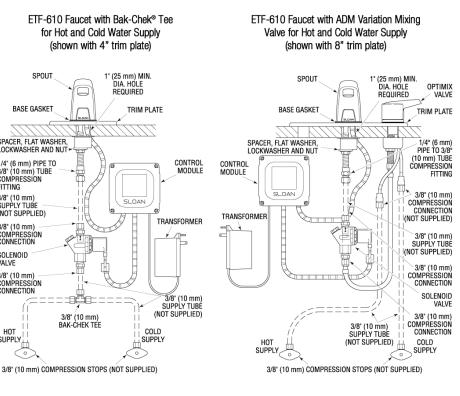

ETF-610 Faucet with BDM and BDT Variation Mixing Valves for Hot and Cold Water Supply (shown with 4" trim plate)



^{3/8&}quot; (10 mm) COMPRESSION STOPS (NOT SUPPLIED)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com