

### **CODE NUMBER**

3370009

### **DESCRIPTION**

1.6/1.1 gpf, Polished Chrome Finish, Fixture Connection Top Spud, Single Flush, Electrical Override, Solar, SOLIS® Exposed Sensor Water Closet Flushometer.

### **DETAILS**

• Flush Volume: 1.6/1.1 gpf (6.0/4.2 Lpf)

• Finish: Polished Chrome (CP)

 Power Type: Solar Valve: Diaphragm

• Override: Electrical

• Valve Body Material: Semi-red Brass

• Fixture Type: Water Closet • Fixture Connection: Top Spud • Rough-In Dimension: 16" (406mm) • Spud Coupling: 1 ½" (38mm) • Supply Pipe: 1" (25mm)

### **FEATURES**

- Handle Packing, Main Seat, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine resistance
- User friendly three (3) second Flush Delay
- "Low Battery" Flashing LED
- Sweat solder adapter with cover tube and cast wall flange with set
- Solar Powered. The sensor assembly is powered by a solar cell that will harvest power from the artificial indoor light (incandescent, fluorescent or LED), and use it as the energy source. The solar cell can provide approximately 100% power with 650 illuminance (lux).
- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed **Bypass**
- Four (4) Size AA Battery Back-up Power Source
- Infrared Sensor with Multiple-focused, Lobular Sensing Fields for high and low target detection
- Fixed Metering Bypass and No External Volume Adjustment to **Ensure Water Conservation**
- If the user is present for less than one minute and leaves the sensing zone or chooses the small override button, a reduced flush initiates (1.1 gpf/4.2 Lpf) eliminating liquid and paper waste, saving 1/2 gallon of water
- If the user is present for greater than one minute and leaves the zone or chooses the large override button, the full fl ush initiates (1.6 gpf/ 6.0 Lpf) eliminating solid waste and paper
- PERMEX® Synthetic Rubber Flex Tube Diaphragm with twin linear filtered bypass and vortex cleansing action
- Flex Tube Diaphragm designed for improved life and reduced maintenance
- ADA Compliant Sloan SOLIS® Electronic Single Flush Solar Powered Infrared Sensor for automatic "No Hands" operation
- Engineered Metal Cover with replaceable Lens Window
- Courtesy Flush® Override Button



### **COMPLIANCES & CERTIFICATIONS**

























(ADA Compliant, BAA Compliant, BABAA Compliant, BREEAM Materials Credit, BREEAM Water Credit, cUPC Certified, EPD, Green Globes Materials & Resources Credit, Green Globes Water Credit, HPD, LEED Materials & Resources EPD Credit, LEED Materials & Resources HPD Credit)

### RECOMMENDED SPECIFICATION

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

# **BATTERY SPECIFICATIONS**

Usage	4- AA Battery Service* Life			
	24 yrs	18 yrs	9 yrs	7.2 yrs
per month	500	1,000	3,000	4,000
per day	25	50	150	200

\* Service life varies according to actual usage & restroom

Battery shelf life: Alkaline= ~10 years - Lithium= ~25 years

# **VALVE OPERATING PRESSURE (FLOWING)**

15-80 PSI (103-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

### **DOWNLOADS**

- Solis 8100 Series (Spanish) Installation Instructions
- Control Stop Repair and Maintenance Guide
- Flush Connections Flanges Repair and Maintenance Guide
- Tail Piece Repair and Maintenance Guide
- Exposed Solis Repair and Maintenance Guide
- Concealed Solis Repair and Maintenance Guide
- Additional Downloads

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



• 1" I.P.S. Screwdriver Bak-Chek® Angle Stop with Free Spinning Vandal Resistant Stop Cap

# **NOTES**


All information contained within this document subject to change without notice.

Looking for other variations of the SOLIS 8113 product? View the general spec sheet with all options.

### WARRANTY

View Warranty Information

# **ROUGH-IN**

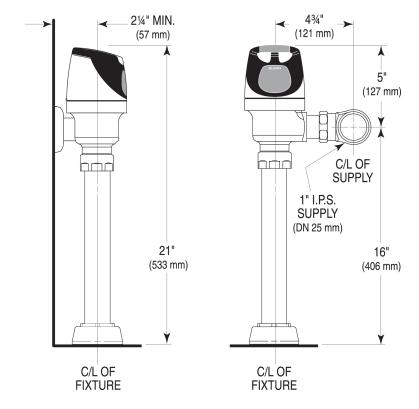

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com