

CODE NUMBER

33820006

DESCRIPTION

Filtered, Refrigerated, 304 Stainless Steel, DropSpot™ On-wall Bottle Filler with Bi-level Cooler.

DETAILS

- Mounting: On-wall
- Configuration: Bottle Filler with Bi-level Cooler
- Filter Option: Filtered (FIL)
- Refrigeration Option: Refrigerated (REF)
- Finish: 304 Stainless Steel (SS)
- Chilling Capacity: 8.0 gph (30.3 Lph)
- Full Load Amps: 5.3
- Length: 19" (483mm)
- Width: 38" (965mm)
- Height: 39 3/5" (1,006mm)
- Weight: 112 lbs
- Installation Location: Indoor
- Number of Stations Served: 2
- Bottle Filler Water Flow Rate: Up to 1.2 gpm
- Bubbler Water Flow Rate: 0.3 gpm (1.1 Lpm)

POWER

- (Standard) 115VAC, 60Hz, 5.3A
- Provide Duplex Receptacle on GFCI Protected Circuit


FEATURES

Bottle Filler

- Touch-free sensor operated bottle filler with 20 second max run time
- Prop 65 and Filter First compliant
- ADA compliant when installed properly
- Up to 1.2 gpm fill rate for quick fill
- Laminar flow water supply
- Soft ambient white light to indicate filter status
- Backlit LED light illuminates bottle filling area when sensor is activated
- Bottle Counter Display indicates the number of 16 oz plastic bottles saved from a land fill as well as the ounces of water dispensed for water consumption tracking

Electric Water Cooler

- ADA compliant when installed properly
- Rough-in matches other manufacturers' recommended rough-in locations for easy replacement
- Antimicrobial bubbler, push bar, and other components
- Drop-down door assembly provides easy access to filter
- Patent pending push bar designed to be activated at any touch point and to provide easy access for cartridge replacement
- Chilling capacity of 8.0 gph of 50F drinking water, based on 80F inlet water and 90F ambient
- Versatile mounting style that allows for left high or right high

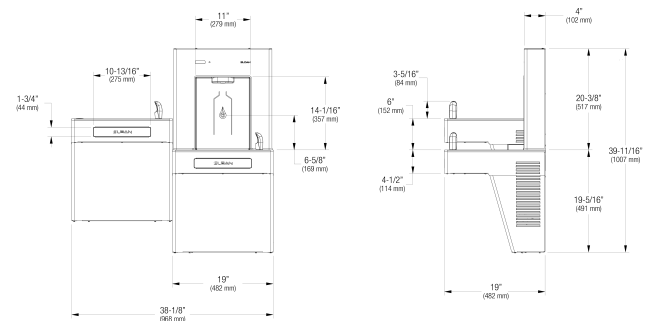

COMPLIANCES & CERTIFICATIONS



ASME



NSF-372

NSF-401

NSF-42

NSF-53



STATE OF CALIFORNIA Proposition 65



(ADA Compliant, ASME A112.18.1 Compliant, cULus Certified, cUPC Certified, cUPC Low Lead Compliant, Filter First, IAPMO, NSF-372 (lead free), NSF-401, NSF-42, NSF-53, NSF-61, Proposition 65, TAS)

ADDITIONAL COMPLIANCES

Listed to UL 399/CSA C22.2 No.120/IAPMO has listed this product to ASME A 112.18.1 / CSA B45.4, IGC 226, IGC 115, NSF-372 and NSF-61/Meets emissions requirement for the FCC/Meets Canada OBC, QBC, and other accessibility requirements/Filter listed to NSF-42, NSF-53, NSF-401

RECOMMENDED SPECIFICATION

Sloan's DropSpot™ On-wall Bottle Filler with Bi-level Cooler Filtered Refrigerated Stainless. Chilling capacity of 8.0 gph of 50F drinking water, based on 80F inlet water and 90F ambient. Unit shall be activated from an antimicrobial front pushbar using less than 5 pounds of force. Bubbler shall deliver a 0.3 gpm flow. Basin and cabinet shall be constructed from 304 stainless steel with satin finish. Bottle filler shall include sensor operated activation with a 20 second maximum run time. Bottle counter display indicates the number of 16 oz plastic bottles saved as well as the ounces of water dispensed for water consumption tracking. White light indicates the water

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

- Refrigerant R-134A
- Optional cane apron available for the bi-level units to assist with ADA compliance (part number 33830030, 33830031). Sold separately

Filter

- 3000 gallon
- Effectively reduces PFAS (PFOA and PFOS), lead, microplastic, cyst, particulate class 1, and chlorine
- Certified to comply with NSF-42, NSF-53, and NSF-401 standards
- Filter is Prop 65 and Filter First compliant

NOTES


All information contained within this document subject to change without notice.

filter status. Unit shall include LED lights that illuminate the bottle filling area. Bottle filler housing construction shall be stainless steel. Bottle filler shall provide up to 1.2 gpm flow rate with a laminar flow. Push bar shall be activated by any touch point on the bar and shall be opened by Sloan access key. Filter drop-down assembly shall be opened by Sloan access key. Filter used in the unit shall have capacity of 3000 gallons at a minimum, and shall reduce PFAS (PFOA and PFOS), lead, microplastic, cyst, chlorine and class 1 particles.

DOWNLOADS

- [DRS120 Bottle Filler with Bi-Level Cooler Installation Instructions](#)
- [FA3000-DRS110-120 Drop Down Filter Assembly Installation Instructions](#)
- [FC3000 Replacement Water Filter Cartridge Installation Instructions](#)
- [DropSpot™ Care and Cleaning Guide](#)
- [Additional Downloads](#)

ROUGH-IN

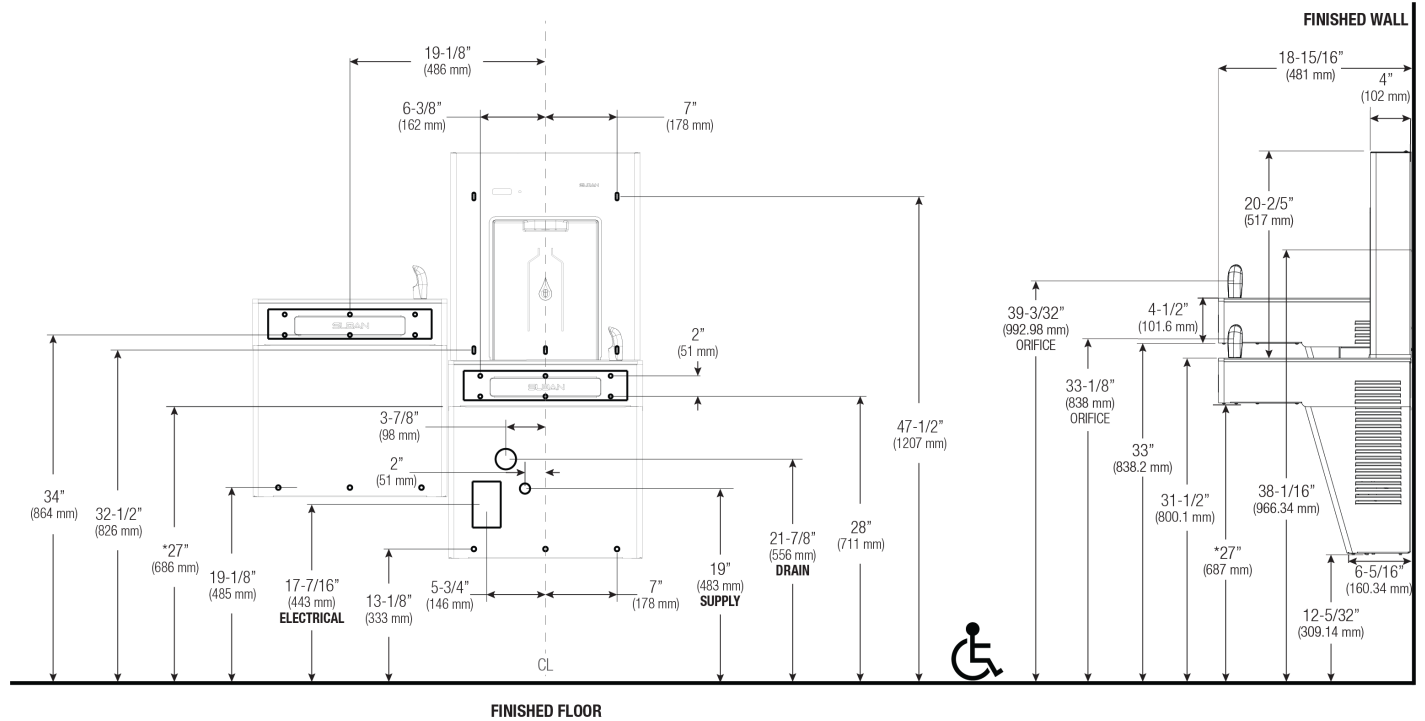

Sloan 10500 Seymour Ave, Franklin Park, IL 60131
Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com