

CODE NUMBER

3400001

DESCRIPTION

1.28 gpf, Filtered, Polished Chrome Finish, Fixture Connection Rear Spud, Single Flush, TruFlush Concealed Manual Water Closet Flushometer.

DETAILS

Flush Volume: 1.28 gpf (4.8 Lpf)Finish: Polished Chrome (CP)

Valve: Piston Bypass: Filtered

• Valve Body Material: Semi-red Brass

Fixture Type: Water ClosetFixture Connection: Rear Spud

FEATURES

- Piston color-coded by flush volume for easy identification
- Corrosion-resistant, vandal resistant wall plate
- High Efficiency flush volume for water conservation
- Easy to push manual button is ADA compliant- less than 5 lbf/22N of force required to activate
- Flood prevention feature limits flow to a trickle in the wide open position
- Heavy duty brass valve body
- Safety collar locks activation assembly to prevent access of internal components without shutting off water
- Replaceable piston assembly, accessible though front wall plate
- Concealed shut off sleeve adjusts flow rate accessible without removing button/bracket assembly
- 1-1/2" NPT (female) Inlet standard
- 1-1/2" NPSM Outlet standard
- Fixed Volume Piston with Filtered O-ring Bypass

VIDEOS

- TruFlush
- TruFlush Installation
- TruFlush Maintenance
- TruFlush Flush Line



COMPLIANCES & CERTIFICATIONS











(ADA Compliant, BAA Compliant, BREEAM Water Credit, EPD, Green Globes Water Credit)

RECOMMENDED SPECIFICATION

Valve shall be concealed with front access wall plate smaller than $7" \times 7"$ and shall have integrated control stop. Valve shall be in compliance with ASTM Alloy Classification for Semi-Red Brass.

VALVE OPERATING PRESSURE (FLOWING)

15-80 PSI (103-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

DOWNLOADS

- TruFlush Manual Installation Instructions
- TruFlush Manual Installation Instructions (Spanish)
- TruFlush Manual Maint Guide
- Additional Downloads

NOTES

All information contained within this document subject to change without notice.


Looking for other variations of the TRF 156 product? View the general spec sheet with all options.

WARRANTY

View Warranty Information



ROUGH-IN

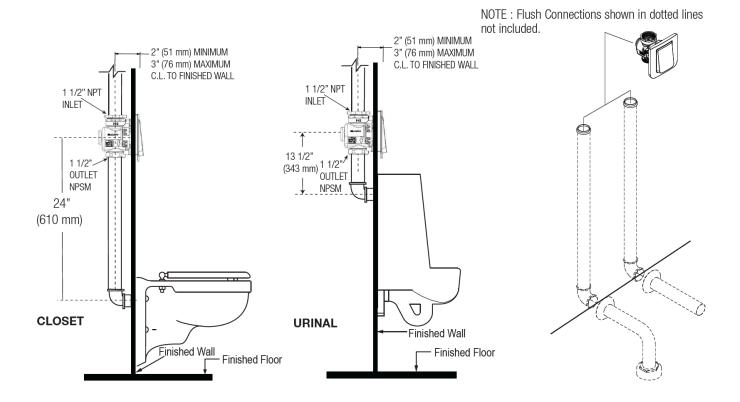

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com