

CODE NUMBER

3400116

DESCRIPTION

1.28 gpf, Filtered, Brushed Stainless Finish, Fixture Connection Rear Spud, Single Flush, Electrical Override, Battery, TruFlush Concealed Sensor Water Closet Flushometer.

DETAILS

- Flush Volume: 1.28 gpf (4.8 Lpf)
- Finish: Brushed Stainless (SF)
- Power Type: Battery
- Valve: Piston
- Bypass: Filtered
- Valve Body Material: Semi-red Brass
- Fixture Type: Water Closet
- Fixture Connection: Rear Spud
- Override: Electrical

FEATURES

- Piston color-coded by flush volume for easy identification
- High Efficiency flush volume for water conservation
- Corrosion-resistant, vandal resistant wall plate
- Self-adaptive Infrared Sensor with Lobular Sensing Fields for accurate target detection
- Electronic Courtesy Flush® Override Button
- "Low Battery" Flashing LED
- Ability to hardwire with battery backup
- Initial target detection Indicator Light (first 10 minutes)
- Flood prevention feature limits flow to a trickle in wide open position
- Heavy duty brass valve body
- Safety collar locks activation assembly to prevent access of internal components without shutting off water
- Replaceable piston assembly, accessible by removing front wall plate
- Concealed shut off sleeve adjusts flow rate
- 1-1/2" NPT (female) Inlet standard
- 1-1/2" NPSM Outlet standard
- Four (4) Size AA Batteries included
- Fixed Volume Piston with Filtered O-ring Bypass

VIDEOS

- ▶ TruFlush
- ▶ TruFlush Installation
- ▶ TruFlush Maintenance
- ▶ TruFlush Flush Line



COMPLIANCES & CERTIFICATIONS



(ADA Compliant, BAA Compliant, BREEAM Water Credit, EPD, Green Globes Water Credit)

RECOMMENDED SPECIFICATION

Valve shall be concealed with front access wall plate smaller than 7" x 7" and shall have integrated control stop. Valve shall be in compliance with ASTM Alloy Classification for Semi-Red Brass.

ELECTRICAL SPECIFICATIONS

- Arming Delay: 8 seconds
- Control Circuit: 6 VDC Input/Solid State
- Flush Delay: 3s
- Self-Adaptive Window: ± 12
- Sensor Range: 22"-46" (559-1,168mm)
- Solenoid Operator: 6 VAC
- Transformers (specify separately):
 - EL-386 (Up to 1 flushometer)
 - EL-451 (up to 6 flushometers)

VALVE OPERATING PRESSURE (FLOWING)

15-80 PSI (103-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

DOWNLOADS

- [TruFlush Sensor Installation Instructions](#)
- [TruFlush Sensor Installation Instructions \(Spanish\)](#)
- [TruFlush Sensor Repair and Maintenance Guide](#)
- [Additional Downloads](#)

NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the TRF 8156 product? [View the general spec sheet with all options.](#)



Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

WARRANTY

[View Warranty Information](#)

ROUGH-IN

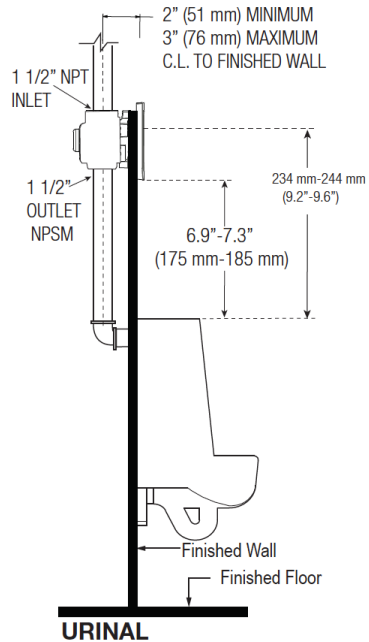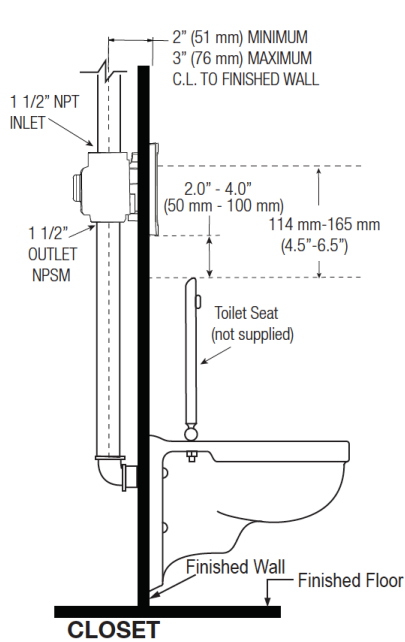

NOTE : Flush Connections shown in dotted lines not included.

