

CODE NUMBER

3522650

DESCRIPTION

1.6 gpf, Rough Brass Finish, Fixture Connection Rear Spud, Single Flush, Crown® Concealed Manual Specialty Water Closet Hydraulic Flushometer.

DETAILS

• Flush Volume: 1.6 gpf (6.0 Lpf)

Finish: Rough BrassValve: Piston

Valve Body Material: Semi-red Brass

Fixture Type: Water Closet
Fixture Connection: Rear Spud
Rough-In Dimension: 16" (406mm)
Spud Coupling: 1 ½" (38mm)
Supply Pipe: 1" (25mm)

FEATURES

- ADA Compliant Non-Hold-Open feature type Actuator (not included, order separately-specify Actuator type listed below)
- Vacuum Breaker
- Non-Hold-Open Push Button, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Handle Packing, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance
- ADA Compliant Non-Hold-Open Actuator
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Elbow Flush Connection and Coupling for 11/2" NPT Back Inlet (for connection in the pipe chase — flush connection through the wall not provided by Sloan)

VIDEOS



Crown Piston Flushometer Basics



COMPLIANCES & CERTIFICATIONS









(ADA Compliant, BAA Compliant, cUPC Certified, UPC Certified)

RECOMMENDED SPECIFICATION

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi- Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

VALVE OPERATING PRESSURE (FLOWING)

15–80 PSI (103–552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

DOWNLOADS

- Concealed Flushometer Installation Instructions for Stainless Steel Fixtures
- Crown Piston Type Exposed Installation Instructions
- Control Stop Repair and Maintenance Guide
- Flush Connections Flanges Repair and Maintenance Guide
- Tail Piece Repair and Maintenance Guide
- Crown/Crown II Repair and Maintenance Guide
- Crown Piston Assembly Repair Kit
- Hydraulic Push Button Options
- Additional Downloads

NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the CROWN 9603 product? View the general spec sheet with all options.

Find a compatible urinal for this flushometer.
Find a compatible water closet for this flushometer.


WARRANTY

View Warranty Information

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



ROUGH-IN

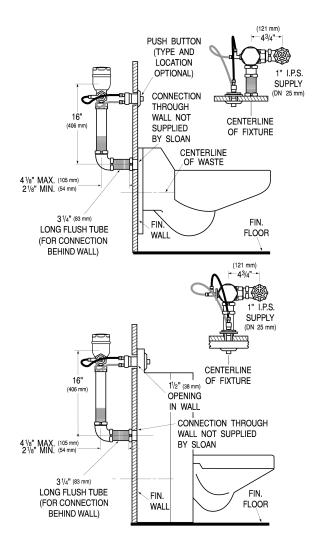

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com