

CODE NUMBER

70001001

DESCRIPTION

SU-7009 Urinal and ROYAL 186 Flushometer.

COMPONENTS

Flushometer: Code 3912633Urinal: Code 1107009

DETAILS

• Flush Volume: 0.125 gpf (0.5 Lpf)

• Nominal Dimensions: 14 $\frac{3}{4}$ " × 14 $\frac{3}{16}$ " × 23 $\frac{1}{2}$ " (375 × 360 × 597mm)

FLUSHOMETER FEATURES

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Sweat Solder Adapter with Cover Tube & Cast Wall Flange with Set Screw
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance
- ADA Compliant Metal Oscillating Non-Hold-Open Handle 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop w/ Free Spinning Vandal Resistant Stop Cap

FIXTURE FEATURES

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- ¾" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested



COMPLIANCES & CERTIFICATIONS





























(ADA Compliant, BAA Compliant, BREEAM Materials Credit, BREEAM Water Credit, CalGreen Compliant, Carbon Neutral, CEC Compliant, cUPC Green Certified, EPD, Green Globes Materials & Resources Credit, Green Globes Water Credit, HPD, LEED Materials & Resources EPD Credit, LEED Materials & Resources HPD Credit, LEED V4 Water Efficiency Credit, Satisfies LEED Credits, WELL Building Standard)

DOWNLOADS

- Small Spud Urinal Installation Instructions
- Royal Exposed Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Additional Downloads

NOTES


All information contained within this document subject to change without notice.

WARRANTY


View Warranty Information



ROUGH-IN



OF FIXTURE

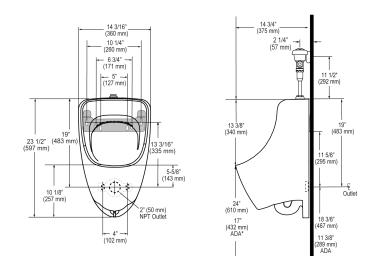

FINISHED FLOOR

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com