

CODE NUMBER

70051402

DESCRIPTION

SU-7009 Urinal and ROYAL 186 SMO Flushometer.

COMPONENTS

Flushometer: Code 3912679Urinal: Code 1107009

DETAILS

• Flush Volume: 0.5 gpf (1.9 Lpf)

• Nominal Dimensions: 14 $\frac{3}{4}$ " × 14 $\frac{3}{16}$ " × 23 $\frac{1}{2}$ " (375 × 360 × 597mm)

FLUSHOMETER FEATURES

- "User in View" Flashing LED
- No External Volume Adjustment to Ensure Water Conservation
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange w/Set Screw
- Stop Seat and Vacuum Breaker molded from PERMEX® Rubber Compound for Chloramine Resistance
- Four (4) Size C Batteries included
- Manual Override Flush Button
- "Low Battery" Flashing LED with Optional Audio Tone
- Optional 24-Hour Sentinel Flush
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap

FIXTURE FEATURES

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- ¾" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- · All mounting hardware included
- 100% factory flush tested



COMPLIANCES & CERTIFICATIONS





















(ADA Compliant, BAA Compliant, BREEAM Water Credit, cUPC Green Certified, EPD, Green Globes Water Credit, HPD, LEED V4 Water Efficiency Credit, Satisfies LEED Credits, WELL Building Standard)

DOWNLOADS

- Small Spud Urinal Installation Instructions
- Optima SMO Installation Instructions
- Royal Exposed Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Royal Manual Diaphragm Flushometer Repair and Maintenance Guide
- Additional Downloads

NOTES


All information contained within this document subject to change without notice.


WARRANTY


View Warranty Information



ROUGH-IN





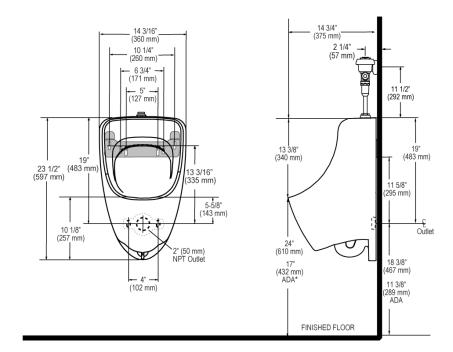

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com