

## **CODE NUMBER**

70061301

#### **DESCRIPTION**

SU-7009 Urinal and ROYAL 186 ESS Flushometer.

## **COMPONENTS**

Flushometer: Code 3452673Urinal: Code 1107009

## **DETAILS**

• Flush Volume: 1.0 gpf (3.8 Lpf)

• Nominal Dimensions: 14  $\frac{3}{4}$ " × 14  $\frac{3}{16}$ " × 23  $\frac{1}{2}$ " (375 × 360 × 597mm)

## **FLUSHOMETER FEATURES**

Quiet, Exposed, Dual Filtered Diaphragm Assembly, Chrome Plated Urinal

- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange w/Set Screw
- OPTIMA® EL-1500 Self-Adaptive Infrared Sensor with Indicator Light
- Non-Hold-Open Integral Solenoid Operator, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- High Back Pressure Vacuum Breaker Flush Connection with One-Piece Bottom Hex Coupling Nut, Spud Coupling and Flange for 3/4" Top Spud
- Stop Seat and Vacuum Breaker molded from PERMEX® Rubber Compound for Chloramine Resistance
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- Infrared Sensor with Multiple-focused, Lobular Sensing Fields for high and low target detection

## **FIXTURE FEATURES**

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- ¾" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested



## **COMPLIANCES & CERTIFICATIONS**













(ADA Compliant, BAA Compliant, cUPC Green Certified, EPD, HPD, UL Certified, WELL Building Standard)

## **DOWNLOADS**

- Small Spud Urinal Installation Instructions
- Royal ESS Concealed and Exposed Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Optima ESS Repair and Maintenance Guide
- Additional Downloads

# **NOTES**


All information contained within this document subject to change without notice.

# WARRANTY

View Warranty Information



# **ROUGH-IN**

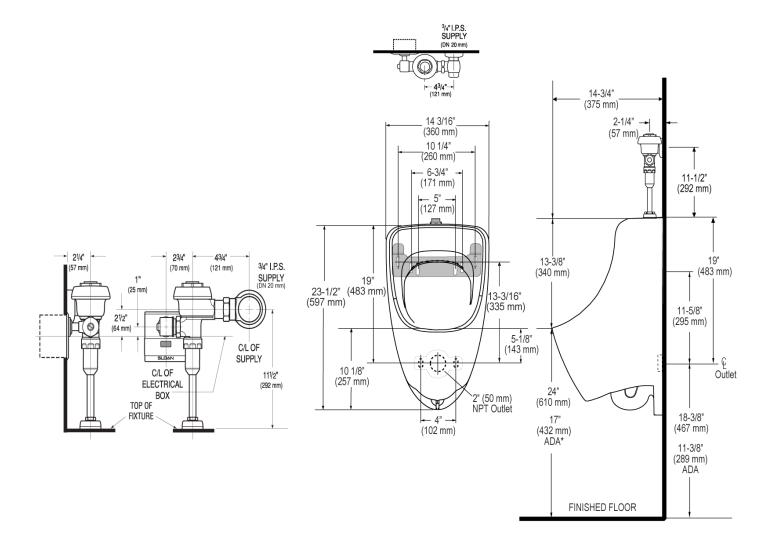

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com