

CODE NUMBER

8603316

DESCRIPTION

1.6/3.5 gpf, Rough Brass Finish, Fixture Connection , Single Flush, PWT™ Concealed Sensor Urinal/Water Closet PWT/Retrofit Flushometer.

DETAILS

- Flush Volume: 1.6/3.5 gpf (6.0/13.2 Lpf)
- Finish: Rough Brass
- Valve: Diaphragm
- Valve Body Material: Semi-red Brass
- Fixture Type: Urinal/Water Closet

FEATURES

- Retrofit kit up to 3.5 gpf valves on existing fixtures
- 15, 30, 45 and 60 minute lock-out options to minimize misuse and maximize water conservation
- Various flush volumes available to match existing fixtures and meet water-efficiency goals
- Can be used with stainless-steel water closet fixtures from Acorn, Bradley, Metcraft and other manufactures
- PERMEX synthetic rubber diaphragm with dual filtered fixed bypass
- Battery Powered
- Four (4) Size AA Battery Power source
- Low Battery flashing LED
- Solenoid activation
- Includes touch-button for
- Touch-button operation
- Stainless steel button is vandal proof, chemical resistant
- White arrows on cables for easy alignment
- Note: Z Locking Ring available for retrofit installation to Zurnt valve bodies

Conversion Kit for: Manual flushometers

- Royal 603
- Royal 611
- Royal 613

Hydraulic flushometers

- Royal 9603
- Royal 9611
- Royal 9613

5 Programs:

- 2 activations in 5 minutes with 15 minute lockout
- 2 activations in 5 minutes with 30 minute lockout
- 2 activations in 5 minutes with 45 minute lockout
- 2 activations in 5 minutes with 60 minute lockout
- Dorm setting of 1 activation with a backside delay of 60 seconds/no lockout



COMPLIANCES & CERTIFICATIONS



(ADA Compliant, BAA Compliant, UPC Certified)

RECOMMENDED SPECIFICATION

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi- Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

VALVE OPERATING PRESSURE (FLOWING)

15–80 PSI (103–552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

DOWNLOADS

- [8603-ESM Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [8603-ESM Maintenance Guide](#)

NOTES

All information contained within this document subject to change without notice.

[Find a compatible urinal](#) for this flushometer.

[Find a compatible water closet](#) for this flushometer.



WARRANTY

[View Warranty Information](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com

ROUGH-IN

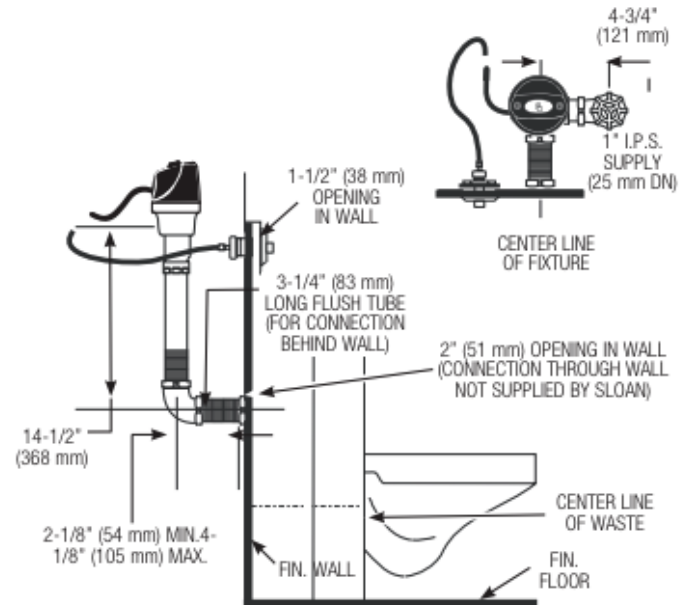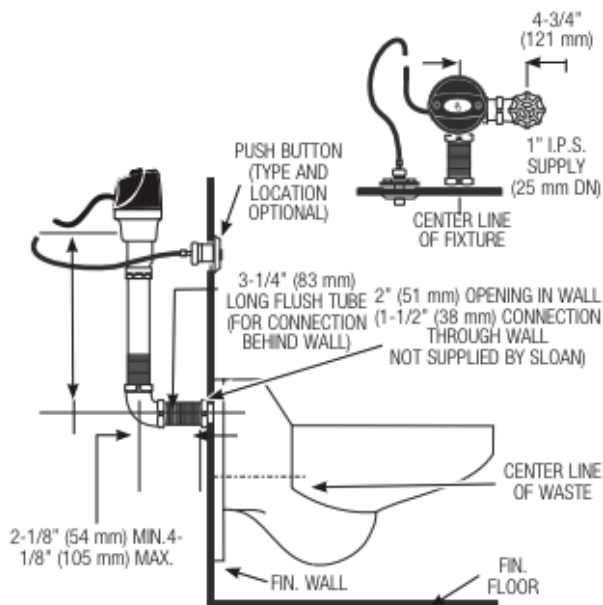

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com