

**代码**

3324491

**描述**

Battery Power Supply, Integrated Side Mixer, Graphite Finish, 0.5 gpm, Multi-Laminar Spray, Infrared Sensor, Bluetooth Adapter Smart Faucet, BASYS® Battery-Powered Deck-Mounted Mid Body Faucet.

**详细信息**

- 流量：0.5 加仑/分钟 (2 升/分钟) (0.5 加仑/分钟)
- 出水类型：多层流式 (MLM)
- 传感器类型：红外线式 (IR)
- 安装类型：单孔
- 电源：电池 (BAT)
- 调温混水阀：集成式侧边混水阀 (ISM)
- 表面处理：石墨 (GR)
- 恢复出厂设置超时：10 秒
- 出厂设置 GPC：0.083

**产品特性**

符合 ADA 规范的商业级电子感应式压铸金属洗手水龙头，具有以下特征：

- 工具一体化
- 所有润湿零件均为不锈钢、工程热塑性塑料、EPDM 和铜或铜合金制造
- 电磁阀安装在可拆卸的托架中，其中还有滤网
- 一体式供水开关
- 可从台面上方使用滤网
- 防破坏喷雾插件，键在水龙头内
- 所有电子设备密封等级均为 IP67
- 镀金电子触点
- 台上有各个诊断指示器，用于指示电池寿命、电磁阀状态和通电模式
- 柔性高压软管，3/8" 压缩接头
- 双稳态电磁阀
- 四 (4) 节 5 号碱性电池
- 可自动设置的双红外线传感器，包含所有安装硬件。
- 管线吹扫模式，消除积水
- 超时可调节
- 标准弓形冠

**电气规格**

- 自调节范围：2"-14" (51-356mm)
- 传感器范围：4"-5" (102-127mm)

**视频**

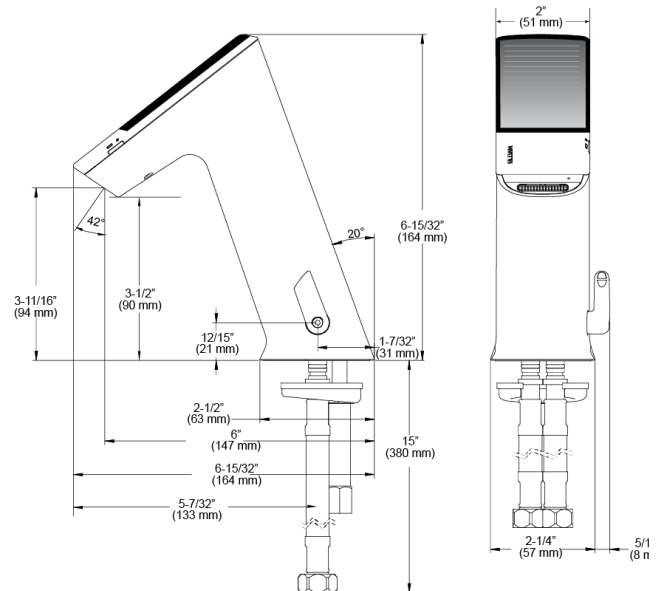

- ▶ BASYS® 水龙头安装和特点
- ▶ BASYS® 水龙头安装中等高度型号
- ▶ PVD 特殊表面处理

**下载**

- [EFX 1Xx/2Xx 安装说明](#)
- [EFX 1Xx/2Xx 替换盒安装说明](#)
- [面板指南](#)
- [红外式常见问题解答 \(维修与保养指南\)](#)
- [EFX-2 XX 维修与保养指南](#)
- [其他下载](#)

仕龙亚洲分公司 10500 中国浙江省杭州市经济技术开发区白杨街道 17 号大街 300 号, 310018 60131

800.982.5839 电话：+86-571-81688197 800.447.8329 • [sloanasia.com](#)

**合规与认证**

(ADA Compliant, CalGreen Compliant, CEC Compliant, cUPC Low Lead Compliant, GPC 0.25 or less, NYC604.4)

**推荐规格**

Sloan BASYS Model No. EFX-250-BAT-ISM-MB-0.5GPM-MLM-IR-FCT Infrared Sensor Activated Electronic Handwashing Faucet for pretempered or hot/cold water supplies. Product to have double infrared sensors with automatic setting feature. PVD Graphite Finish. Solenoid valve housed in removable carrier that closes water supply upon removal eliminating need to access control stops. Solenoid carrier includes strainer for easy above deck service. Thermostatic mixer ordered separately to comply with ASSE 1070 requirements. The product shall be tested and certified to industry standards: ASME A112.18.1M, CSA B125.1, California Health and Safety Code 116875

**注意事项**

本文档中包含的所有信息如有更改，恕不另行通知。

需要 EFX-250 产品的其他规格？[查看包含所有选项的通用规格说明。](#)

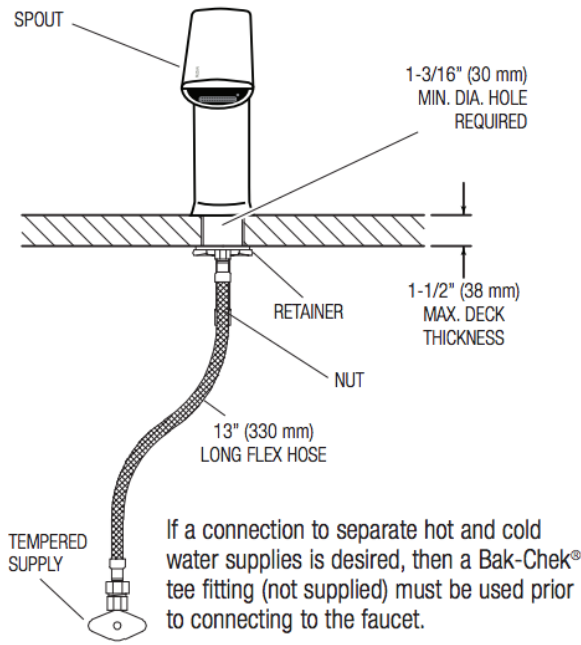
[为这款水龙头寻找匹配的皂液器。](#)

[为这款水龙头寻找兼容的水槽。](#)

**保修期**

3 年

EFX-250.00X.XXXX  
Faucet with Single Line Water Supply



EFX-250.50X.XXXX  
Faucet with Hot and Cold Water Supply

