

#### **CODE NUMBER**

10021302

#### DESCRIPTION

SU-1009 Urinal and ROYAL 186 SMOOTH Flushometer.

#### **COMPONENTS**

Flushometer: Code 3912712Urinal: Code 1101009

#### **DETAILS**

• Flush Volume: 0.25 gpf (0.9 Lpf)

• Nominal Dimensions: 14  $\frac{1}{4}$ " × 17  $\frac{1}{4}$ " × 25  $\frac{1}{2}$ " (362 × 438 × 648mm)

### **FLUSHOMETER FEATURES**

- High Chloramine Resistant PERMEX® Synthetic Rubber Diaphragm with Dual Linear Filtered Bypass and Vortex Cleansing ActionTM
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop
- Locking Vandal Resistant Stop Cap
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange w/Set Screw
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Handle Packing, Main Seat, Stop Seat and Vacuum Breaker to be molded from PERMEXTM Rubber Compound for Chloramine Resistance
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance
- ADA Compliant OPTIMA® SMOOTH® Infrared Sensor for automatic "Hands-free" operation
- 6 VAC Hardwired Transformer sold separately
- "User in View" Flashing LED
- 72 Hour Sentinel Flush Mode
- Mechanical Manual Override Flush Handle

### **FIXTURE FEATURES**

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- ¾" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested



### **COMPLIANCES & CERTIFICATIONS**























(ADA Compliant, BAA Compliant, BREEAM Water Credit, cUPC Green Certified, EPD, Green Globes Water Credit, HPD, LEED V4 Water Efficiency Credit, Satisfies LEED Credits, WaterSense Listed, WELL Building Standard)

#### **DOWNLOADS**

- Standard Spud Urinal Installation Instructions
- Royal Exposed Installation Instructions
- EL 600-A Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Royal Manual Diaphragm Flushometer Repair and Maintenance Guide
- Additional Downloads

### **NOTES**

All information contained within this document subject to change without notice.


# WARRANTY


View Warranty Information

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



## **ROUGH-IN**



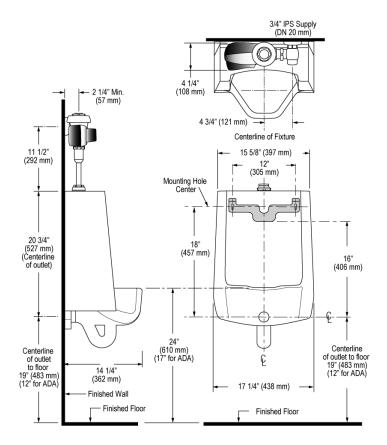

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com