

### **CODE NUMBER**

10101011

## **DESCRIPTION**

SU-1019 Urinal and ROYAL 995 Flushometer.

### **COMPONENTS**

Flushometer: Code 3915522Urinal: Code 1101019

### **DETAILS**

• Flush Volume: 0.125 gpf (0.5 Lpf)

• Nominal Dimensions: 14  $\frac{1}{4}$ " × 17  $\frac{1}{4}$ " × 25  $\frac{1}{2}$ " (362 × 438 × 648mm)

# **FLUSHOMETER FEATURES**

Quiet, Concealed, Diaphragm Type, Rough Brass Urinal Flushometer for either

- ADA Compliant Non-Hold-Open feature type Actuator (not included, order separately-specify Actuator type listed below)
- Elbow Flush Connection and Spud Coupling for 3/4" Concealed Back Spud
- ADA Compliant Non-Hold-Open Actuator
- PERMEX® Synthetic Rubber Diaphragm with Dual Linear Filtered Bypass
- 3/4" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Diaphragm, Stop Seat and Vacuum Breaker to be molded from PERMEX® rubber compound for Chloramine resistance

### **FIXTURE FEATURES**

- White Vitreous China
- Washdown flushing action
- Integral flushing rim
- ¾" I.P.S. rear spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- · All mounting hardware included
- 100% factory flush tested



# **COMPLIANCES & CERTIFICATIONS**



























(ADA Compliant, BAA Compliant, BREEAM Water Credit, CalGreen Compliant, CEC Compliant, cUPC Green Certified, EPD, Green Globes Water Credit, HPD, LEED V4 Water Efficiency Credit, Satisfies LEED Credits, WaterSense Listed, WELL Building Standard)

### **DOWNLOADS**

- Standard Spud Urinal Installation Instructions
- Royal/Regal Series 900 Hydraulic Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Hydraulic Push Button Options
- Additional Downloads

### **NOTES**


All information contained within this document subject to change without notice.


# WARRANTY

View Warranty Information



# **ROUGH-IN**

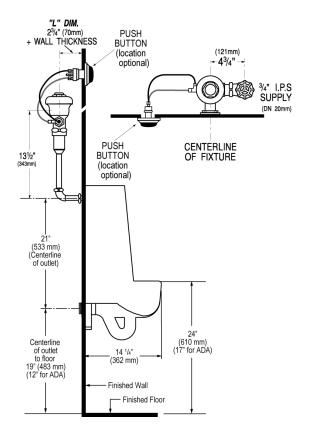

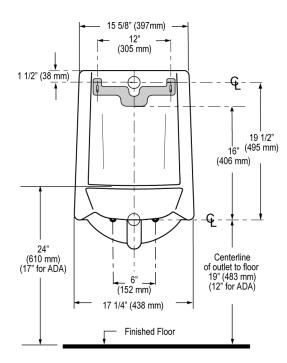

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com