

### **CODE NUMBER**

12001006

## **DESCRIPTION**

SU-1209 Urinal and CROWN 186 Flushometer.

### **COMPONENTS**

Flushometer: Code 3122665Urinal: Code 1101209

### **DETAILS**

• Flush Volume: 0.125 gpf (0.5 Lpf)

• Nominal Dimensions: 14 ½"  $\times$  20  $^{3}$ /4"  $\times$  25  $^{1}$ /4" (368  $\times$  527  $\times$  641mm)

## **FLUSHOMETER FEATURES**

- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Fixed Volume Piston with Filtered O-ring Bypass
- Sweat Solder Adapter with Cover Tube and Cast Set Screw Wall Flange
- Handle Packing, Main Seat, Stop Seat and Vacuum Breaker molded from PERMEX® Rubber Compound for Chloramine Resistance
- Valve designed to accept Low and Ultra-Low Consumption Pistons only to ensure Water Conservation
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap

# **FIXTURE FEATURES**

- White Vitreous China
- Large footprint to cover old caulk lines
- Washdown flushing action
- Integral flushing rim
- ¾" I.P.S. top spud inlet
- 2" NPT outlet flange
- Vandal resistant strainer assembly included
- All mounting hardware included
- 100% factory flush tested



## **COMPLIANCES & CERTIFICATIONS**























(ADA Compliant, BAA Compliant, BREEAM Water Credit, CalGreen Compliant, CEC Compliant, cUPC Green Certified, EPD, Green Globes Water Credit, HPD, LEED V4 Water Efficiency Credit, Satisfies LEED Credits, WELL Building Standard)

### **DOWNLOADS**

- Retrofit Urinal Installation Instructions
- Crown Piston Type Exposed Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- Additional Downloads

# **NOTES**

All information contained within this document subject to change without notice.


# WARRANTY

**View Warranty Information** 

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



# **ROUGH-IN**

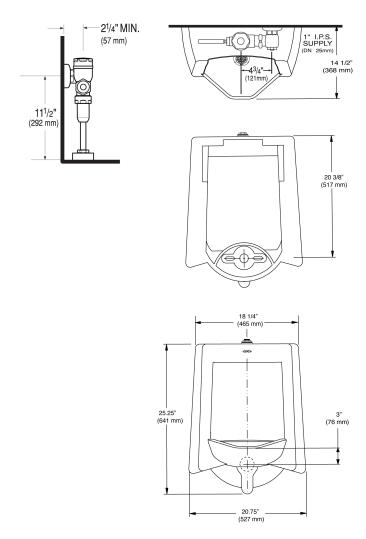

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com