

CODE NUMBER

20001420

DESCRIPTION

ST-2009 Water Closet and SLOAN 111 SFSM Flushometer.

COMPONENTS

Flushometer: Code 3780038Water Closet: Code 2102009

DETAILS

• Flush Volume: 1.28 gpf (4.8 Lpf)

Nominal Dimensions: 26 ¾" × 14" × 15" (679 × 356 × 381mm)

FLUSHOMETER FEATURES

- True Mechanical Override Flush Button
- Four (4) size C batteries included
- "Low Battery" Flashing LED
- "User in View" Flashing LED
- 72-Hour Sentinel Flush
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange with Set Screw
- No External Volume Adjustment to Ensure Water Conservation
- Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine resistance

FIXTURE FEATURES

- White Vitreous China
- Elongated bowl
- Floor mounted, floor outlet
- Siphon jet flushing action achieves 1000g Map score when used with any Sloan flushometer
- Water spot area: 101/8" x 93/8" (26 cm x 24 cm)
- 1½" I.P.S. top spud inlet
- 21/8" fully glazed trapway
- Closet bolts and caps included
- Toilet seat not included
- Static load rating of 1000 lbs. (See Notes)
- WaterSense compliant when used with a WaterSense compliant flushometer



COMPLIANCES & CERTIFICATIONS

















(BAA Compliant, BREEAM Water Credit, EPD, Green Globes Water Credit, HPD, LEED V4 Water Efficiency Credit, Satisfies LEED Credits, WaterSense Listed, WELL Building Standard)

DOWNLOADS

- Sloan ECOS Valve Installation Instructions
- HET Top Spud Installation Instructions
- SS/ST/SU/WETS/WEUS Fixtures Repair and Maintenance Guide
- EBV500/EBV550 Repair and Maintenance Guide
- Sloan Flushometer Repair and Maintenance Guide
- Additional Downloads

NOTES

All information contained within this document subject to change without notice.


Static load tested according to the procedure outlined in Section 6.7 of ASME A112.19.2. Not recommended for bariatric use.

WARRANTY

View Warranty Information



ROUGH-IN

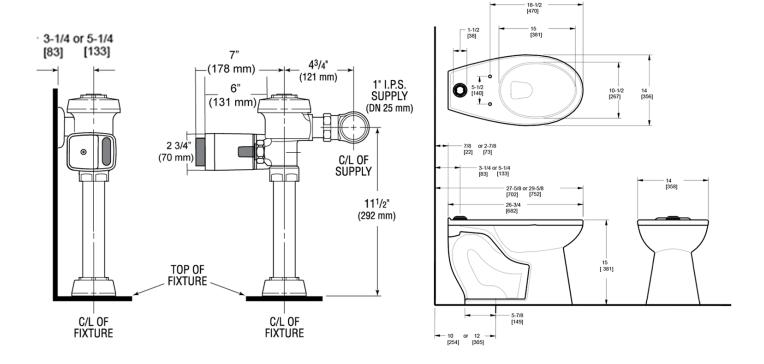

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com