

### **CODE NUMBER**

3084800

### **DESCRIPTION**

3.5 gpf, XL Sweat Solder Adapter Kit, Rough Brass Finish, Fixture Connection Rear Spud, Single Flush, 2-10.75 L Dimension, Regal® Concealed Manual Specialty Water Closet Hydraulic Flushometer.

### **DETAILS**

• Flush Volume: 3.5 gpf (13.2 Lpf)

Finish: Rough BrassValve: Diaphragm

• Valve Body Material: Semi-red Brass

Fixture Type: Water Closet
Fixture Connection: Rear Spud
Rough-In Dimension: 14 ½" (368mm)
Spud Coupling: 1 ½" (38mm)

• Supply Pipe: 1" (25mm)

L Dimension: 2"-10 ¾" (51-273mm)
Adapter: XL Sweat Solder Adapter Kit (XL)

### **FEATURES**

- Valve designed to accept Low and Ultra-Low Consumption Pistons only to ensure Water Conservation
- ADA Compliant Non-Hold-Open Actuator
- Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation.
- Stop Seat and Vacuum Breaker to be molded from PERMEXTM Rubber Compound for Chloramine Resistance.
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- ADA Compliant Non-Hold-Open feature type Actuator (not included, order separately-specify Actuator type listed below)



## **COMPLIANCES & CERTIFICATIONS**









(ADA Compliant, BAA Compliant, BABAA Compliant, UPC Certified)

### RECOMMENDED SPECIFICATION

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

# **VALVE OPERATING PRESSURE (FLOWING)**

15-80 PSI (103-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

# **DOWNLOADS**

- Royal/Regal Series 900 Hydraulic Installation Instructions
- Control Stop Repair and Maintenance Guide
- Flush Connections Flanges Repair and Maintenance Guide
- Tail Piece Repair and Maintenance Guide
- Regal Flushometers Repair and Maintenance Guide
- Series 900 Flushometers Repair and Maintenance Guide
- Hydraulic Push Button Options
- Additional Downloads

# NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the REGAL 952 product? View the general spec sheet with all options.

Find a compatible urinal for this flushometer.
Find a compatible water closet for this flushometer.


## WARRANTY

**View Warranty Information** 

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



# **ROUGH-IN**

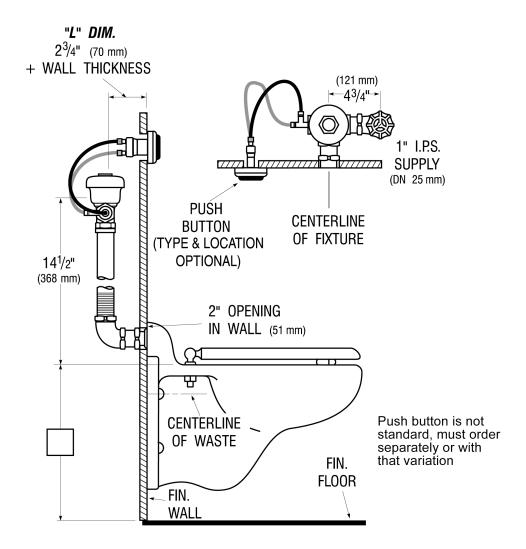

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com