

#### **CODE NUMBER**

3365164BT

### **DESCRIPTION**

Bluetooth, 4" Trim Plate, Box Transformer Power Supply, Back-Check Tee, Polished Chrome Finish, 0.5 gpm, Multi-Laminar Spray, Infrared Sensor, Optima® Hardwired-Powered Deck-Mounted Low Body Faucet.

#### **DETAILS**

Flow Rate: 0.5 gpm (1.9 Lpm) (0.5GPM)
Spray Type: Multi-Laminar (MLM)

Sensor Type: InfraredMounting Type: Single Hole

• Mounting Size: Single Hole 1-1/4" to 1-1/2"

• Trim Plate: 4" (102mm) (4)

Power Supply: Box Transformer (BOX)
 Temperature Mixer: Back-Check Tee (TEE)

Finish: Polished Chrome (CP)
 Factory Default Timeout: 30 seconds
 Factory Default Gallons per Cycle: 0.25

## **FEATURES**

ADA Compliant, Water Usage and Battery Strength Reporting, Wireless Settings Adjustment, Commercial Grade Faucet, Integrated Water Shut-off, Hygienic Line Flush, On-demand or Metered Activation, Self-adapting Sensor, Cast Brass Spout, Quick Connect Fittings

### **ELECTRICAL SPECIFICATIONS**

Battery Life: 3 years 8,000 cycles/month
 Optional power harvesting significantly extends service life

Sensor Range: 4"-5" (102-127mm)
Timeout Adjustment Settings: 30s

## **POWER SUPPLY OPTIONS**

- 6VDC Plug Adapter (included with PLG models), 0362006
- 6VDC Ganged Adapter Kit (up to 6 units)(sold separately), 0362035\*
- 24VAC Box Transformer (included with BOX models), 0345370PK
- \* when converting units to hardwired with battery back-up

# **VIDEOS**


Sloan Connect App®

Sloan Optima Below Deck Faucet


# **DOWNLOADS**

- Optima Smart Faucet Below Deck Installation Instructions
- Trim Plate Guide
- Faucet Spray Heads Repair and Maintenance Guide
- ETF-610/EBF-615 Below Deck Repair and Maintenance Guide
- Additional Downloads





# **COMPLIANCES & CERTIFICATIONS**





(ADA Compliant, ASME A112.18.1 Compliant, CalGreen Compliant, CEC Compliant, cUPC Certified, cUPC Low Lead Compliant, EPD, GPC 0.25 or less, HPD, IAPMO, NSF-61, NYC604.4, Proposition 65, TAS, UL Certified, UPC Certified, UPC Low Lead Compliant, WaterSense Listed, WELL Building Standard)

## RECOMMENDED SPECIFICATION

Faucet shall include cast brass body, quick-connect fittings, twist-off/shut-off solenoid assembly, removable battery cartridge, flexible power supply and allow adjustment of settings wirelessly via Apple or Android smartphones.

## **NOTES**

All information contained within this document subject to change without notice.

Looking for other variations of the ETF-610 product? View the

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com





general spec sheet with all options.


Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

## **WARRANTY**

View Warranty Information



## **ROUGH-IN**

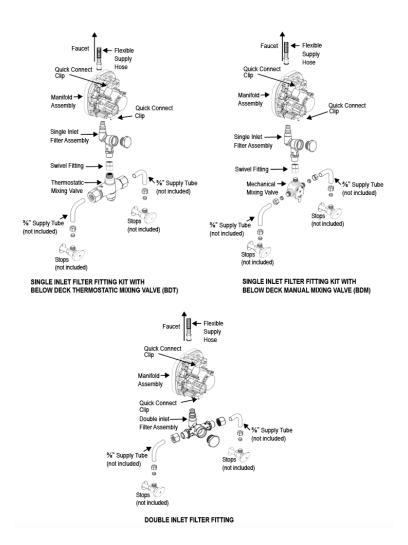

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com