

#### **CODE NUMBER**

3915409

#### **DESCRIPTION**

1.0 gpf, Rough Brass Finish, Fixture Connection Top Spud, Single Flush, 2-10.75 L Dimension, Royal® Concealed Manual Specialty Urinal Hydraulic Flushometer.

#### **DETAILS**

• Flush Volume: 1.0 gpf (3.8 Lpf)

Finish: Rough BrassValve: Diaphragm

• Valve Body Material: Semi-red Brass

• Fixture Type: Urinal

• Fixture Connection: Top Spud

• Rough-In Dimension: 14 ½" (368mm)

Spud Coupling: 1 ¼" (32mm)
Supply Pipe: 1" (25mm)

• L Dimension: 2"-10 3/4" (51-273mm)

### **FEATURES**

Quiet, Concealed, Diaphragm Type, Rough Brass Urinal Flushometer for either

- ADA Compliant Non-Hold-Open Actuator
- Valve designed to accept Low and Ultra-Low Consumption Pistons only to ensure Water Conservation
- Double Slip Elbow Flush Connection and Spud Coupling for 11/4"
   Concealed Back Spud"
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Diaphragm, Stop Seat and Vacuum Breaker to be molded from PERMEX® rubber compound for Chloramine resistance



### **COMPLIANCES & CERTIFICATIONS**











(ADA Compliant, BAA Compliant, BABAA Compliant, cUPC Certified, UPC Certified)

#### RECOMMENDED SPECIFICATION

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

### **VALVE OPERATING PRESSURE (FLOWING)**

15-80 PSI (103-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

# **DOWNLOADS**

- Control Stop Repair and Maintenance Guide
- Flush Connections Flanges Repair and Maintenance Guide
- Tail Piece Repair and Maintenance Guide
- Series 900 Flushometers Repair and Maintenance Guide
- Hydraulic Push Button Options
- Additional Downloads

### NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the ROYAL 992 product? View the general spec sheet with all options.


Find a compatible urinal for this flushometer. Find a compatible water closet for this flushometer.

# WARRANTY

View Warranty Information



# **ROUGH-IN**

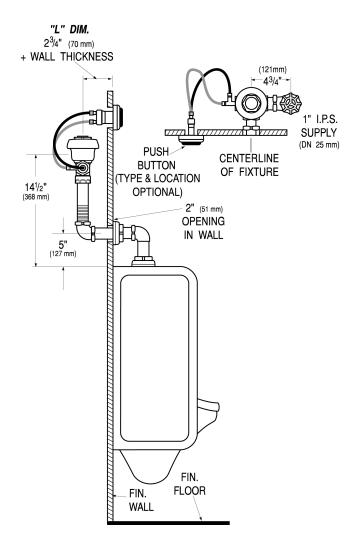

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com